FRAME HEIGHTS AND RAMP ANGLE DATA

S/T 10003 Pickup

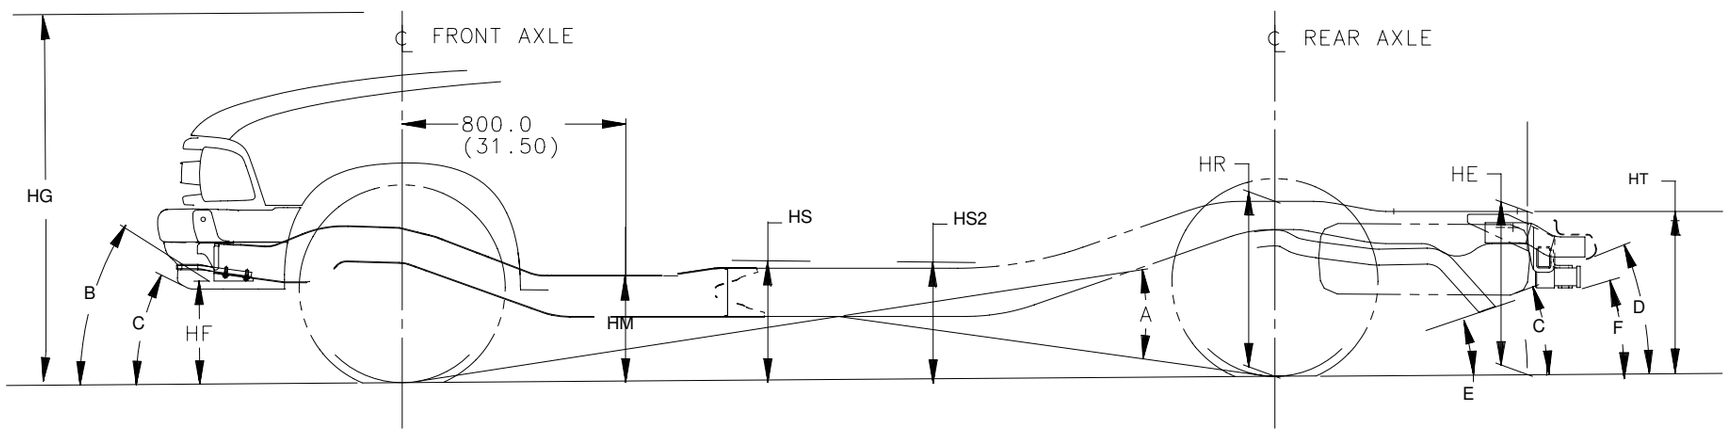

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point–Front**

HS2 ..... **Step H-Point–Second**

HT ..... **Rear Cargo Load Height**

Angle

A ..... **Ramp breakover**

Approach Angle(s) (Bottom of)

B ..... **Front Air Deflector**

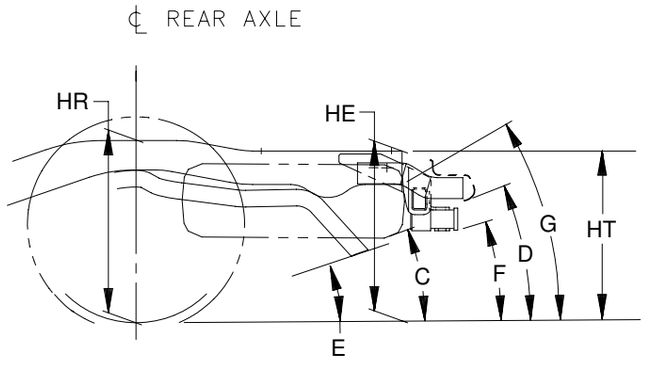

Departure Angle(s) (Bottom of)

C ..... **Spare Tire**

D ..... **Rear Bumper**

E ..... **Tailpipe**

F ..... **Platform Hitch**

G ..... **Frame at End**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

S 10603 108.0" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																				
1) 4200 P205/75R15	1757	1222	2979	2500	2300	—	12.4	62.6	14.7	25.5	17.9	26.8	—	9.8	60.7	12.5	22.4	15.9	22.7	20	22	17	15	17	—
2) 4200 P235/55R16	1776	1254	3030	2500	2300	—	10.9	61.5	13.5	24.7	16.8	26.2	—	7.8	59.7	11.0	21.7	14.6	22.4	17	17	16	15	16	—
2) 4600 P205/75R15	1767	1243	3010	2500	2700	—	12.4	63.6	15.4	27.2	18.9	28.9	—	10.5	61.2	13.1	22.7	16.5	23.1	21	23	18	16	18	—

S 10803 118.0" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																					
1) 4600 P205/75R15	1790	1248	3038	2500	2700	26.4	12.4	63.5	15.3	27.2	18.8	29.0	20.5	10.5	61.2	13.1	22.8	16.5	23.1	20	23	15	14	18	—	24
2) 4900 P205/75R15	1989	1266	3255	2500	2700	26.5	12.2	63.5	15.2	27.2	18.7	29.0	20.7	11.5	61.1	13.3	22.8	16.4	23.3	20	25	15	14	18	—	24

S 10653 123.0" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																					
1) 4400 P205/75R15	1851	1351	3202	2500	2300	—	12.7	62.4	14.6	25.1	17.7	19.0	26.1	—	10.8	60.8	12.8	22.4	16.0	17.1	22.9	18	24	18	15	17	—
2) 4400 P235/55R16	1870	1384	3253	2500	2300	—	10.6	61.1	13.0	24.3	16.4	17.7	25.7	—	8.0	59.4	10.8	21.7	14.3	15.9	22.7	14	18	17	15	16	—
2) 4600 P205/75R15	1855	1369	3224	2500	2700	—	12.3	63.3	15.1	26.8	18.5	20.0	28.5	—	10.5	61.2	13.1	22.8	16.5	17.6	23.2	19	23	18	16	18	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

T 10603 108.0" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F
1) 4650 P205/75R15	2220	1324	3544	2700	2300	—	13.8	64.0	16.1	27.0	19.3	28.3	—	12.7	62.4	14.6	24.1	17.7	24.6	20	27	20	18	23	—
2) 4650 31 X 10.5 R15	2249	1397	3646	2700	2300	—	17.3	67.8	19.8	30.9	23.1	32.3	—	16.4	66.1	18.3	27.6	21.4	28.0	28	35	26	22	26	—
2) 5150 P235/70R15	2220	1395	3615	2700	2700	—	13.8	65.1	16.9	28.7	20.4	30.5	—	13.1	62.7	15.0	24.7	18.1	25.3	21	28	22	19	25	—
2) 5150 P235/75R15	2217	1415	3632	2700	2700	—	14.3	65.6	17.4	29.2	20.9	30.9	—	13.9	63.4	15.6	25.2	18.7	25.8	22	30	23	19	26	—

T 10803 118.0" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G
1) 5150 P235/70R15	2268	1316	3585	2700	2700	28.2	13.8	65.1	16.9	28.9	20.4	30.9	22.5	13.2	62.8	15.0	24.7	18.1	25.2	19	28	18	16	24	—	26
2) 5150 P235/75R15	2268	1316	3585	2700	2700	28.7	14.3	65.7	17.4	29.5	20.9	31.4	23.1	13.7	63.3	15.6	25.2	18.7	25.7	20	29	19	17	26	—	27

T 10653 123.0" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
1) 4650 P205/75R15	2382	1396	3778	2800	2300	—	13.8	63.9	15.9	26.7	19.1	20.4	27.9	—	12.7	62.6	14.7	24.1	17.9	19.1	24.5	18	27	20	17	22	—
2) 4900 31 X 10.5 R15	2417	1538	3955	2800	2700	—	17.1	68.0	19.9	31.5	23.3	24.7	33.1	—	16.4	66.4	18.5	27.4	21.7	23.0	27.6	26	35	26	21	25	—
2) 5150 P235/70R15	2328	1446	3775	2800	2700	—	13.9	65.0	16.7	28.5	20.2	21.6	30.2	—	13.0	62.9	15.0	24.6	18.2	19.4	25.2	19	28	22	19	24	—
2) 5150 P235/75R15	2358	1446	3775	2800	2700	—	14.4	65.5	17.2	29.1	20.7	22.2	30.7	—	13.8	63.5	15.7	25.2	18.8	19.8	25.8	20	30	23	19	25	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

S/T 10506 4–Door Utility

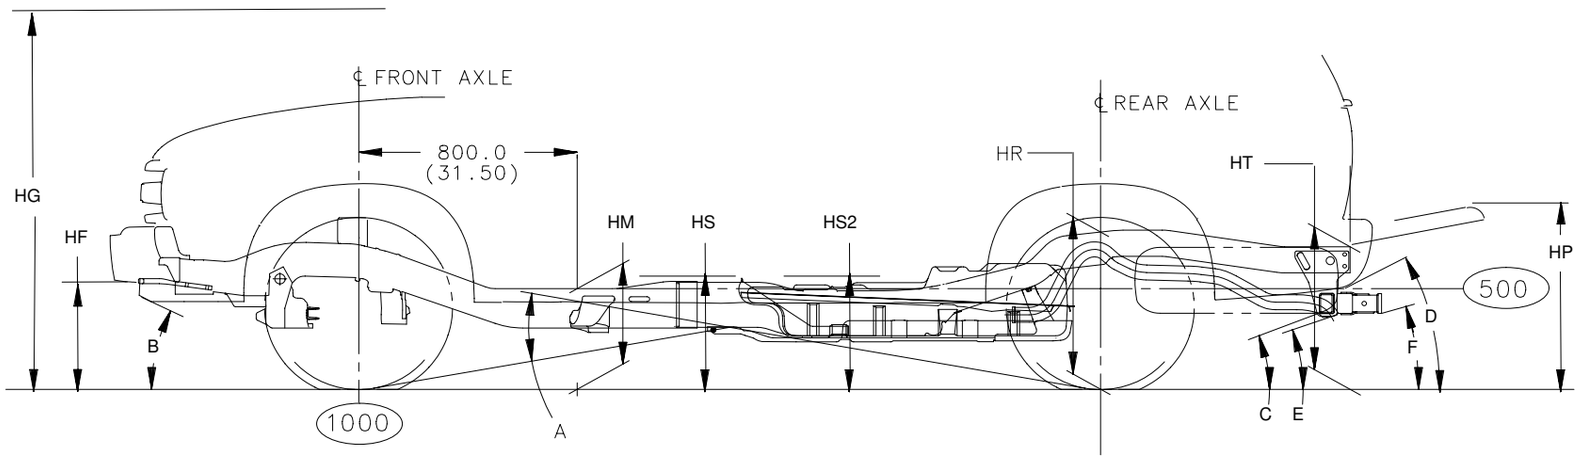

Heights (To Ground)

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HP ..... **Top of Tailgate (Down)**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point–Front**

HS2 ..... **Step H-Point–Second**

HT ..... **Rear Cargo Load Height**

Angle

A ..... **Ramp breakover**

Approach Angle(s) (Bottom of)

B ..... **Front Air Deflector**

Departure Angle(s) (Bottom of)

C ..... **Spare Tire**

D ..... **Rear Bumper**

E ..... **Tailpipe**

F ..... **Platform Hitch**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

S 10506 107.0" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HP	HS	HS2	HT	HF	HG	HM	HR	HP	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																					
1) 5000 P205/75R15	2029	1652	3682	2500	2700	13.4	64.8	16.0	24.9	32.0	19.4	19.4	30.3	12.3	62.7	14.3	22.0	28.1	17.5	17.0	26.8	20	26	21	22	19	17
2) 5000 P235/70R15	2028	1667	3696	2500	2700	13.8	65.2	16.4	25.3	32.4	19.8	19.8	30.7	12.7	63.1	14.8	22.4	28.5	17.9	17.4	27.2	21	27	22	23	20	17
2) 5000 P235/70R15	2026	1666	3693	2500	2800	14.4	35.4	16.7	25.3	32.3	20.0	19.9	30.6	13.4	63.4	15.2	22.4	28.1	18.3	17.6	27.0	22	29	22	22	20	17

T 10506 107.0" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																					
1) 5350 P205/75R15	2300	1782	4082	2800	2700	13.8	64.6	16.0	31.3	24.4	19.3	19.1	29.8	12.0	62.5	14.1	28.2	22.0	17.3	17.0	26.9	20	26	21	22	20	17
2) 5350 P235/70R15	2299	1797	4097	2800	2700	14.2	65.0	16.4	31.7	24.8	19.7	19.5	30.1	12.4	63.0	14.5	28.7	22.4	17.7	17.4	27.3	21	27	22	23	20	18
2) 5350 P235/70R15	2297	1796	4093	2800	2900	14.2	64.8	16.4	31.4	24.6	19.5	19.3	29.8	12.7	63.2	14.8	28.2	22.4	18.0	17.5	27.0	21	27	22	22	20	17
2) 5350 P235/75R15	2323	1748	4072	2800	2900	14.6	65.6	17.0	32.4	25.5	20.2	20.1	30.8	13.0	63.5	15.1	28.0	22.5	18.3	17.7	27.0	22	28	22	22	20	17

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

S/T 10516 2–Door Utility

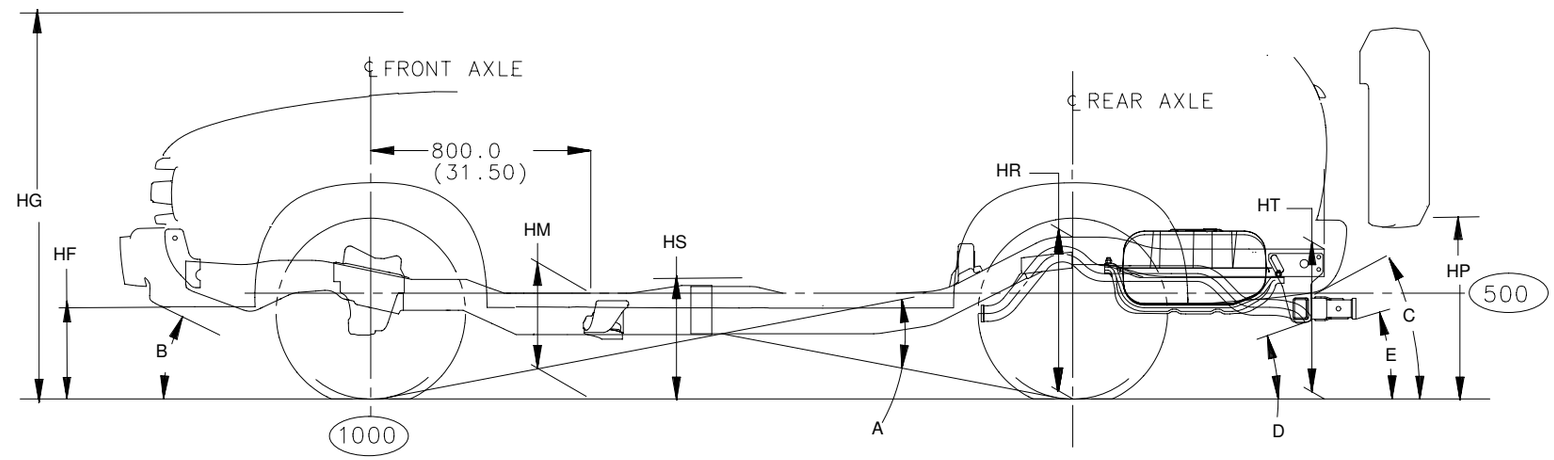

Heights (To Ground)

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HP ..... Top of Tailgate (Down)

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point–Front

HT ..... Rear Cargo Load Height

Angle

A ..... Ramp Breakover

Approach Angle(s) (Bottom of)

B ..... Front Air Deflector

Departure Angle(s) (Bottom of)

C ..... Rear Bumper

D ..... Tailpipe

E ..... Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

S 10516 100.5" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HT	HF	HG	HM	HP	HR	HS	HT	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr																			
1) 4450 P205/75R15	1909	1636	3545	2200	2600	13.7	65.1	16.3	32.1	25.0	19.6	30.2	13.2	63.7	15.2	28.2	22.5	18.4	26.9	23	28	22	20	17
2) 4450 P235/70R15	1909	1642	3551	2200	2600	14.1	65.6	16.7	32.5	25.4	20.1	30.7	13.6	64.1	15.6	28.6	22.9	18.8	27.3	24	29	23	21	18

T 10516 100.5" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HT	HF	HG	HM	HP	HR	HS	HT	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr																			
1) 4850 P205/75R15	2116	1730	3847	2500	2600	13.8	64.9	16.2	31.6	24.7	19.4	29.8	12.4	63.3	14.7	28.5	22.5	17.9	27.1	23	27	22	20	17
2) 4850 P235/70R15	2116	1730	3847	2500	2700	14.3	65.1	16.5	31.6	24.8	19.7	29.9	13.1	63.8	15.2	28.5	22.7	18.4	27.2	24	28	23	21	18
2) 4850 P235/75R15	2114	1767	3880	2500	2700	14.8	65.5	17.0	31.9	25.2	20.1	30.2	13.6	64.3	15.7	29.0	23.3	18.9	27.7	25	29	23	21	18
2) 5000 31 X 10.5 R15	2212	1794	4007	2500	2700	17.7	67.7	19.4	33.7	27.3	22.5	32.1	17.2	66.3	18.4	30.6	25.2	21.2	29.4	31	36	26	25	21

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C/K Truck (Current)

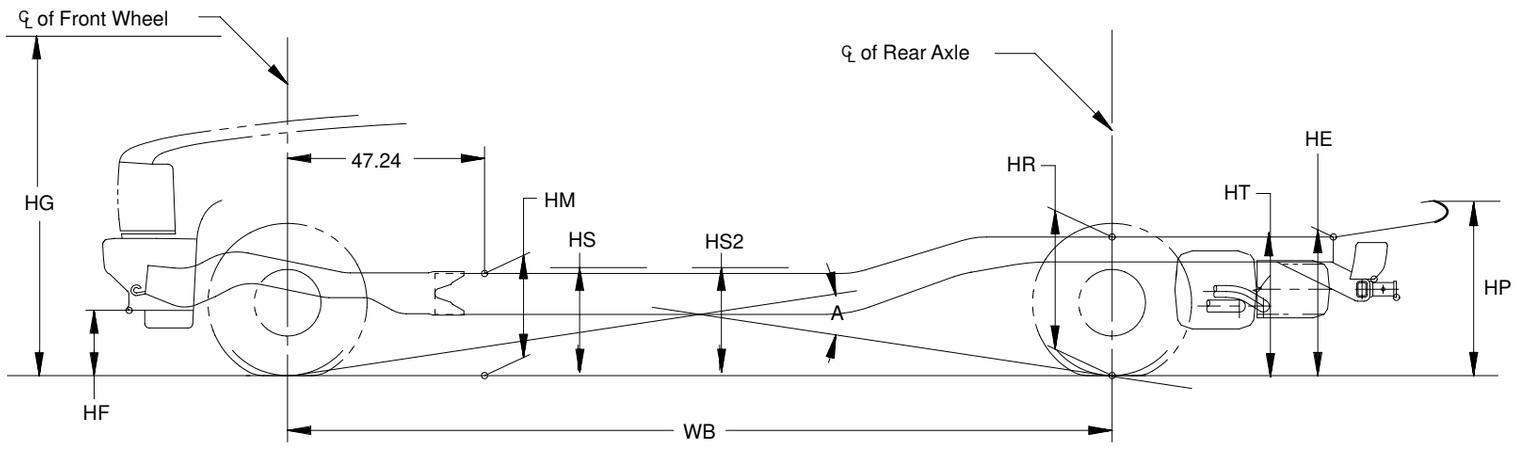

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof height to ground**

HM ..... **Normal Top of Frame**

HP ..... **Top of Tailgate**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point–Front**

HS2 ..... **Step H-Point–Second**

HT ..... **Rear Cargo Load Height**

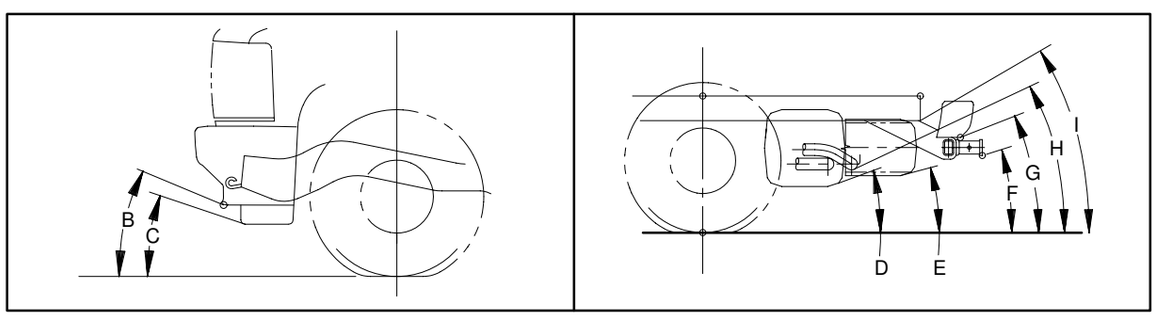

Angle

A ..... **Ramp Breakover**

Approach Angle(s) (Bottom of)

B ..... **Front Bumper**

C ..... **Front Air Deflector**

Departure Angles(s) (Bottom of)

D ..... **Fuel Tank and Shield**

E ..... **Spare Tire**

F ..... **Platform Hitch**

G ..... **Rear Bumper**

H ..... **Exhaust**

I ..... **Frame at End**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

C 10516 111.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HG	HM	HP	HR	HS	HT	HF	HG	HM	HP	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 6100 P235/75R15	2409	2102	4511	3200	3686	10.4	71.4	18.7	33.6	26.9	19.8	29.4	8.2	69.8	16.8	29.7	24.1	18.0	26.0	25	29	20	25	—	19	26	32	—
2) 6100 P235/75R15	2409	2102	4511	3500	3686	10.4	71.4	18.7	33.6	26.9	19.8	29.4	7.1	70.6	16.6	29.7	24.1	17.8	26.0	25	27	18	25	—	19	26	32	—
2) 6100 P235/75R15	2409	2102	4511	3526	3686	10.4	71.4	18.7	33.6	26.9	19.8	29.4	7.0	70.6	16.6	29.7	24.1	17.7	26.0	25	27	18	25	—	19	26	32	—

C 10706 117.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at25 Maximum GAWR Front/Rear25														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 6300 P235/75R15	2743	2232	4975	3200	3448	10.4	72.3	18.2	32.0	25.9	19.1	19.5	28.0	9.5	70.5	16.8	27.5	22.9	17.8	17.5	24.1	23	31	22	—	16	14	19	23	—
2) 6300 P235/70R15	2681	2254	4936	3200	3686	10.4	72.7	18.3	32.5	26.2	19.3	19.8	28.5	9.3	71.0	16.9	28.2	23.4	17.9	17.8	24.7	23	31	22	—	17	15	20	25	—
2) 6300 P235/75R15	2681	2254	4936	3500	3686	10.4	72.7	18.3	32.5	26.2	19.3	19.8	28.5	8.2	71.8	16.7	28.2	23.4	17.9	17.8	24.7	23	29	20	—	17	15	20	25	—
2) 6300 P235/75R15	2681	2254	4936	3526	3686	10.4	72.7	18.3	32.5	26.2	19.3	19.8	28.5	/8.1	71.8	16.7	28.2	23.4	17.9	17.8	24.7	23	29	20	—	17	15	20	25	—

C 10753 141.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 6200 P235/75R15	2415	1705	4120	3500	3686	28.5	10.4	70.6	18.8	27.7	19.9	22.3	31.4	22.7	7.5	68.1	16.0	23.0	17.1	19.7	25.5	18	28	19	—	19	17	23	26	33
2) 6200 P235/75R15	2415	1705	4120	3600	3686	28.5	10.4	70.6	18.8	27.7	19.9	22.3	31.4	22.7	7.1	68.1	15.9	23.0	17.0	19.7	25.5	18	27	18	—	19	17	23	26	33

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 10906 131.5” Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 6800 P235/75R15	2368	2439	4808	2950	3968	10.2	71.3	18.2	33.3	26.5	19.4	20.1	29.2	8.7	68.8	16.3	30.1	23.9	17.4	17.9	26.2	20	30	21	19	—	15	20	25	—
2) 6800 P235/75R15	2368	2439	4808	3200	3968	10.2	71.3	18.2	33.3	26.5	19.4	20.1	29.2	7.8	69.2	16.0	30.1	23.9	17.1	17.9	26.2	20	28	19	19	—	15	20	25	—
2) 6800 P235/75R15	2368	2439	4808	3400	3968	10.2	71.3	18.2	33.3	26.5	19.4	20.1	29.2	7.0	69.7	15.7	30.1	23.9	16.9	17.9	26.2	20	27	18	19	—	15	20	25	—
2) 7700 LT245/75R16	2860	2718	5578	3600	6084	12.7	73.6	20.7	35.6	28.9	21.8	22.5	31.5	11.3	72.0	19.2	29.9	25.7	20.3	21.0	26.6	25	34	26	20	—	15	20	26	—
2) 7700 LT245/75R16	2860	2718	5578	3800	6084	12.7	73.6	20.7	35.6	28.9	21.8	22.5	31.5	10.8	72.2	19.0	29.9	25.7	20.1	21.0	26.6	24	33	25	20	—	15	20	26	—

K 10516 111.5” Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HT	HF	HG	HM	HP	HR	HS	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																							
1) 6250 P245/75R16	2681	2198	4880	3925	3750	13.4	73.2	19.7	35.0	28.7	22.2	31.0	9.2	73.1	17.7	31.0	26.0	20.1	27.6	24	31	22	28	—	21	28	35	—
2) 6250 LT245/75R16	2681	2198	4880	3925	3750	13.6	73.4	19.9	35.2	28.9	22.4	31.2	9.6	73.3	18.0	31.4	26.4	20.4	27.9	24	31	23	29	—	21	28	36	—
2) 6250 P265/75R16	2681	2198	4880	3925	3750	14.0	73.9	20.4	35.7	29.3	22.8	31.6	9.9	73.8	18.3	31.7	26.7	20.8	28.2	25	32	24	30	—	22	29	37	—
2) 6450 P245/75R16	3100	2206	5307	3925	3750	13.2	73.2	19.8	35.1	28.8	22.1	31.0	10.9	72.6	18.4	30.9	26.2	20.7	27.5	25	34	26	28	—	21	28	35	—
2) 6450 LT245/75R16	3100	2206	5307	3925	3750	13.5	73.4	20.0	35.2	29.0	22.3	31.2	11.3	72.8	18.7	31.3	26.5	21.0	27.9	25	34	26	28	—	21	28	35	—
2) 6450 P265/75R16	3100	2206	5307	3925	3750	13.8	73.9	20.4	35.7	29.5	22.7	31.6	11.6	73.2	19.1	31.5	26.9	21.3	28.2	26	35	27	30	—	22	29	37	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 10706 117.5" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 6800 P245/75R16	2932	2432	5364	3600	3750	13.4	74.9	19.5	34.5	28.3	21.9	22.2	30.5	11.0	73.5	17.6	31.1	25.9	20.0	20.4	27.6	23	34	26	—	21	18	24	31	—
2) 6800 P245/75R16	2966	2519	5486	3600	3750	13.5	74.8	19.5	34.3	28.2	21.9	22.1	30.3	11.2	73.6	17.7	31.2	26.0	20.1	20.5	27.6	23	35	26	—	21	18	24	31	—

K 10753 141.5" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 6200 P245/75R16	2726	1771	4498	3925	3750	29.6	13.3	72.6	19.7	29.1	22.2	24.3	32.4	24.2	10.3	70.8	17.4	25.0	19.8	22.4	27.0	19	33	25	—	21	19	24	30	35
2) 6200 LT245/75R16	2726	1771	4498	3925	3750	29.7	13.6	72.8	20.0	29.3	22.4	24.5	32.6	24.6	10.6	71.0	17.7	25.3	20.1	22.7	27.4	19	33	25	—	21	19	25	30	35
2) 6200 P265/75R16	2726	1771	4498	3925	3750	30.2	14.0	73.3	20.4	29.8	22.8	24.9	33.1	24.9	10.9	71.4	18.0	25.7	20.5	23.1	27.7	20	34	26	—	22	19	25	32	36
2) 6600 P245/75R16	2726	1866	4593	3925	3750	29.5	13.3	72.6	19.7	29.1	22.2	24.3	32.4	24.6	10.4	70.4	17.2	25.1	19.6	22.1	27.4	18	33	25	—	22	19	25	31	36
2) 6600 LT245/75R16	2726	1866	4593	3925	3750	29.7	13.6	72.8	19.9	29.3	22.4	24.5	32.5	25.0	10.8	70.7	17.5	25.5	19.9	22.3	27.8	18	33	25	—	22	19	25	31	36
2) 6600 P265/75R16	2726	1866	4593	3925	3750	30.2	14.0	73.2	20.4	29.7	22.8	24.9	33.0	25.3	11.0	71.1	17.8	25.8	20.2	22.7	28.1	19	35	26	—	23	20	26	33	37

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 10906 131.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 7300 P245/75R16	2701	2583	5284	3925	4000	13.5	72.9	19.5	34.3	28.2	21.9	22.2	31.3	10.4	71.5	17.1	31.4	25.7	19.6	20.1	28.5	20	33	25	22	—	17	22	29	—
2) 7300 LT245/75R16	2701	2583	5284	3925	4000	13.7	73.1	19.7	34.5	28.4	22.1	22.4	31.5	10.7	71.8	17.5	31.8	26.1	19.9	20.4	28.9	20	33	25	22	—	17	22	29	—
2) 8050 LT245/75R16	3206	2797	6004	3925	4800	14.1	74.5	20.5	36.2	29.7	22.9	23.5	33.1	13.1	72.9	19.2	32.7	27.3	21.7	21.8	29.9	23	38	30	23	—	18	23	31	—

C 20743 154.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3030	2284	5314	3600	5690	31.4	16.3	73.8	20.7	30.2	21.6	23.0	34.6	25.8	15.6	70.9	18.7	25.8	19.6	20.4	29.0	19	33	—	—	24	18	26	28	36
2) 8600 LT245/75R16	3309	2274	5583	3800	5690	31.3	17.6	74.3	21.6	30.4	22.5	23.5	34.5	25.5	17.4	71.5	19.8	25.8	20.8	21.1	28.6	22	37	—	—	24	17	25	27	35

C 20903 131.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
2) 8600 LT245/75R16	2497	1334	3832	3600	6000	34.4	17.0	74.2	22.2	32.6	23.3	37.3	25.8	15.5	70.7	18.6	26.1	19.8	28.6	24	33	—	—	21	18	23	32	32
2) 8600 LT245/75R16	2497	1334	3832	4100	6000	34.4	17.0	74.2	22.2	32.6	23.3	37.3	25.8	14.1	70.7	18.1	26.1	19.2	28.6	23	31	—	—	21	18	23	32	32

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle

2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 20906 131.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	2568	2705	5273	3600	6084	17.7	73.6	20.7	35.5	28.9	21.9	22.5	31.4	15.7	71.0	18.4	30.7	25.6	19.6	20.3	27.2	22	33	—	20	—	16	21	27	—
2) 8600 LT245/75R16	2568	2705	5273	4100	6084	17.8	73.6	20.8	35.5	28.9	21.9	22.5	31.4	14.4	71.6	18.0	30.7	25.6	19.1	20.3	27.2	21	31	—	20	—	16	21	27	—

C 20953 155.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	2828	2060	4889	3600	6000	32.2	17.3	73.2	21.3	31.1	22.4	35.0	25.7	16.4	71.1	18.9	26.0	20.1	28.5	20	35	—	—	21	18	23	33	32
2) 8600 LT245/75R16	2828	2060	4889	4100	6000	32.2	17.3	73.2	21.3	31.1	22.4	35.0	25.7	15.1	71.1	18.4	26.0	19.5	28.5	20	32	—	—	21	18	23	33	32

K 20743 154.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3365	2265	5631	4060	5530	32.0	18.7	74.8	21.0	31.3	23.2	24.0	34.6	26.5	18.1	72.1	19.2	26.9	21.4	21.7	29.0	19	38	—	—	24	18	26	28	36
2) 8600 LT245/75R16	3639	2233	5872	4250	5530	32.1	18.7	74.8	21.0	31.4	23.2	24.1	34.7	26.4	18.2	72.2	19.3	26.9	21.5	21.8	28.9	19	38	—	—	24	18	25	28	35

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle

2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 20753 141.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3091	2119	5210	4250	6000	32.3	18.7	74.3	21.1	31.5	23.5	35.2	25.7	16.9	72.0	18.4	26.4	20.9	28.5	20	36	—	—	20	19	25	30	35
2) 8600 LT245/75R16	3091	2119	5210	4500	6000	32.3	18.8	74.3	21.1	31.5	23.6	35.2	25.7	16.3	72.1	18.2	26.4	20.7	28.5	20	35	—	—	20	19	25	30	35

K 20903 131.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3060	1651	4711	4250	6000	33.7	18.5	74.5	21.5	32.4	23.9	36.5	25.6	16.8	72.0	18.4	26.4	20.9	28.4	21	35	—	—	21	18	23	32	32
2) 8600 LT245/75R16	3060	1651	4711	4500	6000	33.7	18.5	74.6	21.5	32.4	24.0	36.5	25.6	16.3	72.0	18.2	26.4	20.7	28.4	21	34	—	—	21	18	23	32	32

K 20906 131.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	2911	2826	5737	4250	6000	19.4	73.5	20.2	34.7	28.7	22.7	22.8	31.7	16.6	71.6	17.9	29.9	25.6	20.4	20.9	27.4	21	35	—	19	—	14	19	25	—
2) 8600 LT245/75R16	2911	2826	5737	4500	6000	19.4	73.5	20.3	34.7	28.7	22.7	22.8	31.7	16.2	71.9	17.8	29.9	25.6	20.3	20.9	27.4	20	34	—	19	—	14	19	25	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle

2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 20953 155.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3255	2174	5430	4250	6000	32.1	18.8	74.0	20.9	31.2	23.3	34.9	25.6	17.7	72.2	18.8	26.4	21.2	28.4	18	37	—	—	20	17	22	30	31
1) 8600 LT245/75R16	3255	2174	5430	4500	6000	32.0	18.8	74.0	20.9	31.2	23.4	34.9	25.6	17.7	72.2	18.8	26.4	21.3	28.4	18	37	—	—	20	17	22	30	31

C 30743 154.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 9400 LT215/85R16	3231	2563	5795	3950	6350	31.1	17.3	74.0	21.3	30.2	22.2	23.3	34.3	25.4	16.5	71.2	19.3	25.6	20.2	20.7	28.6	19	35	—	—	23	17	25	26	35
2) 9400 LT225/75R16	3231	2563	5795	3950	6350	30.5	16.8	73.5	20.8	29.6	21.7	22.7	33.8	24.8	16.1	70.7	18.8	25.1	19.7	20.2	28.0	18	34	—	—	23	16	24	25	34

C 30903 131.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 9000 LT245/75R16	2679	1696	4376	3600	6084	33.6	17.3	73.9	22.0	32.0	23.1	36.5	25.8	16.4	70.6	18.9	26.0	20.1	28.6	22	35	—	—	20	18	23	30	31
2) 9000 LT245/75R16	2679	1696	4376	4100	6084	33.6	17.3	73.9	22.0	32.0	23.2	36.4	25.7	15.2	70.6	18.5	26.0	19.7	28.5	22	32	—	—	20	18	23	30	31
2) 10,000 LT215/85R16	2686	1916	4602	3600	7500	34.1	17.1	74.1	22.1	32.4	23.3	37.0	26.4	16.2	71.3	19.2	26.7	20.3	29.2	23	34	—	—	21	18	23	31	31
2) 10,000 LT225/75R16	2686	1916	4602	3600	7500	33.6	16.6	73.6	21.6	31.9	22.8	36.5	25.8	15.7	70.8	18.7	26.1	19.8	28.6	22	33	—	—	20	17	22	30	31
2) 10,000 LT215/85R16	2686	1916	4602	4100	7500	34.1	17.3	74.1	22.2	32.4	23.4	37.0	26.4	15.2	71.4	18.8	26.7	19.9	29.2	22	32	—	—	21	18	23	31	31
2) 10,000 LT225/75R16	2686	1916	4602	4100	7500	33.6	16.7	73.6	21.7	31.9	22.8	36.5	25.8	14.5	70.8	18.2	26.1	19.3	28.6	21	31	—	—	20	17	22	30	31

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle

2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 30943 168.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
[1] 9000 LT245/75R16	2978	2052	5030	4100	6084	32.3	17.6	74.4	21.4	31.3	22.6	23.6	35.2	25.7	16.1	71.3	18.8	26.0	20.0	20.8	28.5	17	34	—	—	20	17	22	30	31
[2] 9600 LT245/75R16	3025	2114	5140	4100	6084	32.2	17.6	74.3	21.4	31.2	22.5	23.5	35.1	25.9	16.2	70.9	18.7	26.0	19.8	20.4	28.7	17	34	—	—	21	18	23	30	31
[2] 10,000 LT215/85R16	2986	2251	5237	4100	7500	33.0	17.6	74.8	21.6	31.9	22.8	23.9	35.9	26.4	16.1	72.0	19.0	26.7	20.2	21.6	29.2	18	34	—	—	21	18	23	31	31
[2] 10,000 LT225/75R16	2986	2251	5237	4100	7500	32.5	17.0	74.2	21.0	31.3	22.2	23.4	35.4	25.8	15.5	71.4	18.4	26.1	19.6	21.0	28.6	17	33	—	—	20	17	22	30	31

C 30953 155.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
[1] 10,000 LT215/85R16	2893	2519	5412	3600	7500	32.5	17.2	73.3	21.3	31.3	22.4	35.4	26.4	16.3	71.5	19.1	26.7	20.3	29.2	19	34	—	—	23	18	23	31	31
[2] 10,000 LT225/75R16	2893	2519	5412	3600	7500	32.0	16.6	72.8	20.8	30.8	21.9	34.9	25.9	15.8	71.0	18.6	26.1	19.7	28.7	18	33	—	—	22	17	22	30	31
[2] 10,000 LT215/85R16	2893	2519	5412	4100	7500	32.5	17.3	73.3	21.4	31.3	22.5	35.4	26.4	15.3	71.6	18.6	26.7	19.8	29.2	19	32	—	—	23	18	23	31	31
[2] 10,000 LT225/75R16	2893	2519	5412	4100	7500	32.0	16.7	72.8	20.8	30.8	21.9	34.8	25.8	14.7	71.0	18.0	26.1	19.2	28.6	18	31	—	—	22	17	22	30	31

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 31003 135.5" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																							
1) 10,000 LT245/75R16	2787	1966	4754	3600	6084	32.8	17.3	73.3	21.6	31.2	22.7	—	25.6	16.4	70.6	18.9	25.9	20.0	—	22	35	—	31	—	—	—	27	24
2) 9000 LT245/75R16	2787	1966	4754	4100	6084	32.8	17.4	73.3	21.6	31.2	22.8	—	25.5	15.3	70.6	18.5	25.9	19.6	—	21	33	—	31	—	—	—	27	24
2) 9000 LT215/85R16	2803	2142	4945	4100	7500	33.6	17.2	73.6	21.8	31.8	23.0	—	26.2	15.2	71.4	18.7	26.6	19.8	—	21	32	—	32	—	—	—	28	24
2) 10,000 LT225/75R16	2803	2142	4945	4100	7500	33.1	16.7	73.1	21.3	31.3	22.4	—	25.7	14.7	70.8	18.2	26.1	19.3	—	21	31	—	31	—	—	—	27	24
2) 11,000 LT215/85R16	2805	2174	4980	4100	8250	33.0	17.3	73.4	21.7	31.4	22.8	—	26.3	15.2	71.1	18.6	26.5	19.7	—	21	33	—	32	—	—	—	28	24
2) 11,000 LT225/75R16	2805	2174	4980	4100	8250	32.5	16.8	72.9	21.1	30.8	22.3	—	25.8	14.7	70.6	18.1	26.0	19.2	—	20	31	—	31	—	—	—	27	24
2) 15,000 225/70R19.5	3254	2324	5579	5000	11000	33.0	18.3	77.9	25.2	32.0	27.6	—	28.3	16.8	75.8	22.9	28.4	25.3	—	22	31	—	35	—	—	—	39	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 31403 159.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
[1] 10,000 LT245/75R16	3055	1993	5049	3600	6084	33.1	17.3	73.2	21.5	31.7	22.6	—	25.7	17.1	71.0	19.3	26.1	20.5	—	20	36	—	32	—	—	—	27	24
[2] 9000 LT245/75R16	3055	1993	5049	4100	6084	33.1	17.3	73.2	21.5	31.7	22.6	—	25.7	16.0	71.0	18.8	26.1	20.0	—	19	34	—	32	—	—	—	27	24
[2] 9000 LT215/85R16	3071	2169	5240	4100	7500	33.3	17.4	73.3	21.6	31.8	22.7	—	26.2	16.1	71.7	19.0	26.6	20.2	—	19	34	—	32	—	—	—	28	24
[2] 10,000 LT225/75R16	3071	2169	5240	4100	7500	32.8	16.9	72.7	21.1	31.3	22.2	—	25.6	15.6	71.2	18.5	26.1	19.6	—	18	33	—	31	—	—	—	27	23
[2] 11,000 LT215/85R16	3074	2201	5275	4100	8250	32.7	17.5	73.1	21.4	31.4	22.6	—	26.2	16.1	71.4	18.9	26.5	20.1	—	19	34	—	32	—	—	—	28	24
[2] 11,000 LT225/75R16	3074	2201	5275	4100	8250	32.2	17.0	72.6	20.9	30.8	22.1	—	25.7	15.6	70.9	18.4	26.0	19.6	—	18	33	—	31	—	—	—	27	24
[2] 15,000 225/70R19.5	3847	2606	6453	5000	11000	32.6	17.7	77.3	24.6	31.6	27.0	—	28.1	16.9	75.9	22.9	28.2	25.3	—	19	31	—	35	—	—	—	39	24

C 31803 183.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
[1] 15,000 225/70R19.5	3740	2619	6360	5000	11000	32.4	17.9	77.2	24.6	31.6	27.0	—	28.1	16.9	75.9	22.8	28.2	25.2	—	17	31	—	35	—	—	—	41	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 30743 154.5" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 9400 LT215/85R16	3686	2555	6242	4500	6100	32.2	18.8	74.9	21.1	31.4	23.3	24.1	34.7	26.4	18.0	72.1	19.2	26.9	21.4	21.7	28.9	18	37	—	—	24	17	25	27	35
2) 9400 LT225/75R16	3686	2555	6242	4500	6100	32.3	18.2	74.7	20.7	31.4	22.9	23.9	34.8	26.6	17.4	72.0	18.8	26.9	21.0	21.5	29.1	17	36	—	—	23	17	25	26	34

K 30903 131.5" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																							
1) 9200 LT245/75R16	2993	1777	4770	4250	6084	33.6	18.6	74.6	21.5	32.3	24.0	36.4	25.9	16.8	71.5	18.3	26.4	20.7	28.7	21	35	—	—	21	18	23	30	31
2) 9200 LT245/75R16	2993	1777	4770	4500	6084	33.6	18.6	74.5	21.5	32.3	24.0	36.5	25.9	16.2	71.5	18.1	26.4	20.5	28.7	21	34	—	—	21	18	23	30	31
2) 10,000 LT225/75R16	3010	1983	4993	4250	7500	32.9	18.0	73.9	20.9	31.7	23.4	35.8	25.0	16.3	71.5	17.7	25.9	20.1	27.8	20	34	—	—	19	16	21	28	30
2) 10,000 LT215/85R16	3010	1983	4993	4250	7500	33.4	18.6	74.5	21.5	32.2	23.9	36.3	25.6	16.8	72.0	18.2	26.4	20.7	28.3	21	35	—	—	20	17	22	30	30
2) 10,000 LT225/75R16	3010	1983	4993	4500	7500	32.9	18.1	74.0	21.0	31.7	23.4	35.8	25.0	15.8	71.5	17.5	25.9	20.0	27.7	19	33	—	—	19	16	21	28	30
2) 10,000 LT215/85R16	3010	1983	4993	4500	7500	33.4	18.6	74.5	21.5	32.2	23.9	36.3	25.6	16.3	72.0	18.0	26.4	20.5	28.3	20	34	—	—	20	17	22	30	30

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 30943 168.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 9200 LT245/75R16	3318	2121	5439	4500	6084	32.4	18.8	75.0	20.9	31.6	23.4	24.2	35.2	25.8	17.4	72.0	18.5	26.4	21.0	21.6	28.6	17	37	—	—	21	18	23	30	31
2) 10,000 LT215/85R16	3347	2355	5703	4500	7500	32.3	18.8	75.0	20.9	31.5	23.4	24.2	35.2	25.7	17.5	72.4	18.6	26.4	21.0	22.0	28.5	16	37	—	—	20	17	22	30	30
2) 10,000 LT225/75R16	3347	2355	5703	4500	7500	31.8	18.3	74.4	20.4	31.0	22.9	23.7	34.7	25.1	17.0	71.9	18.1	25.9	20.5	21.5	27.9	16	35	—	—	19	17	22	29	30

K 30953 155.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 10,000 LT225/75R16	3204	2100	5305	4250	7500	32.3	18.2	73.7	20.6	31.3	23.0	35.1	25.0	16.7	71.8	17.9	25.8	20.3	27.8	17	35	—	—	20	16	21	28	30
2) 10,000 LT215/85R16	3204	2100	5305	4250	7500	32.8	18.7	74.3	21.1	31.8	23.5	35.7	25.6	17.2	72.3	18.4	26.4	20.8	28.4	18	36	—	—	21	17	22	30	30
2) 10,000 LT225/75R16	3204	2100	5305	4500	7500	32.3	18.2	73.8	20.6	31.3	23.1	35.1	25.0	16.2	71.8	17.6	25.8	20.0	27.8	17	34	—	—	20	16	21	28	30
2) 10,000 LT215/85R16	3204	2100	5305	4500	7500	32.8	18.7	74.3	21.1	31.8	23.6	35.7	25.6	16.7	72.3	18.1	26.4	20.5	28.4	17	35	—	—	21	17	22	30	30

K 31003 135.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 9200 LT245/75R16	3088	2304	5393	4500	6084	32.0	18.9	73.8	21.0	31.0	23.4	—	25.6	16.4	71.5	18.1	26.3	20.5	—	20	35	—	31	—	—	—	27	24
2) 12,000 LT225/75R16	3130	2303	5434	4500	8600	31.8	18.3	73.4	20.6	30.7	23.0	—	25.3	16.0	70.8	17.3	25.8	19.8	—	19	34	—	30	—	—	—	26	23
2) 12,000 LT215/85R16	3130	2303	5434	4500	8600	32.3	1838	73.9	21.1	31.2	23.5	—	25.8	16.5	71.3	17.9	26.3	20.3	—	19	35	—	31	—	—	—	27	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle

2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 31403 159.5" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																							
[1] 12,000 LT225/75R16	3145	2361	5507	4500	8600	31.5	18.4	73.1	20.4	30.6	22.8	—	25.4	16.1	70.9	17.3	25.8	19.7	—	16	34	—	30	—	—	—	28	23
[2] 12,000 LT215/85R16	3145	2361	5507	4500	8600	32.0	18.9	73.6	20.9	31.1	23.3	—	25.9	16.6	71.4	17.8	26.4	20.3	—	17	35	—	32	—	—	—	29	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C/K Truck (New)

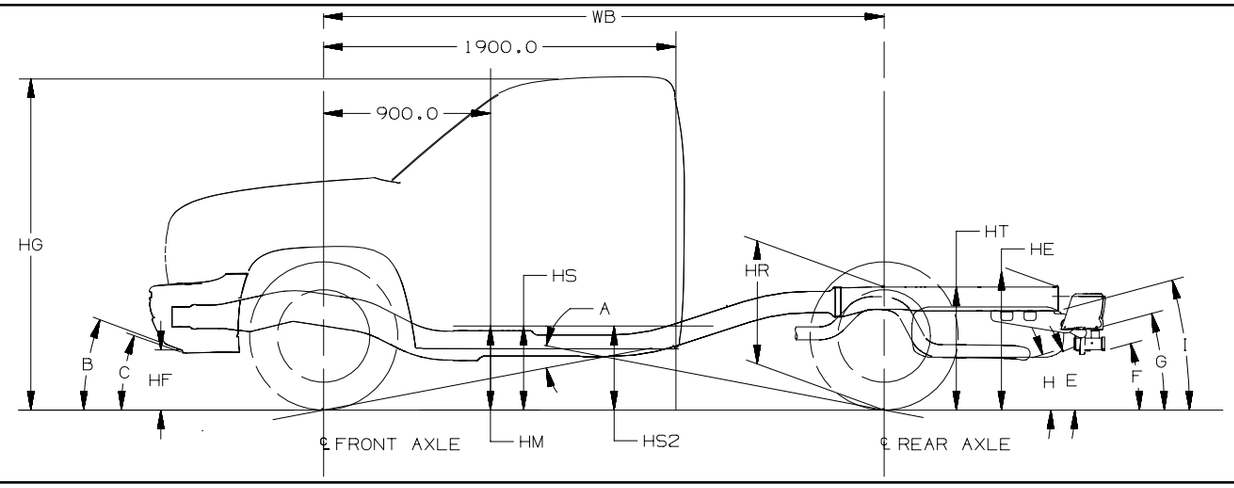

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof height to ground**

HM ..... **Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point–Front**

HS2 ..... **Step H-Point–Second**

HT ..... **Rear Cargo Load Height**

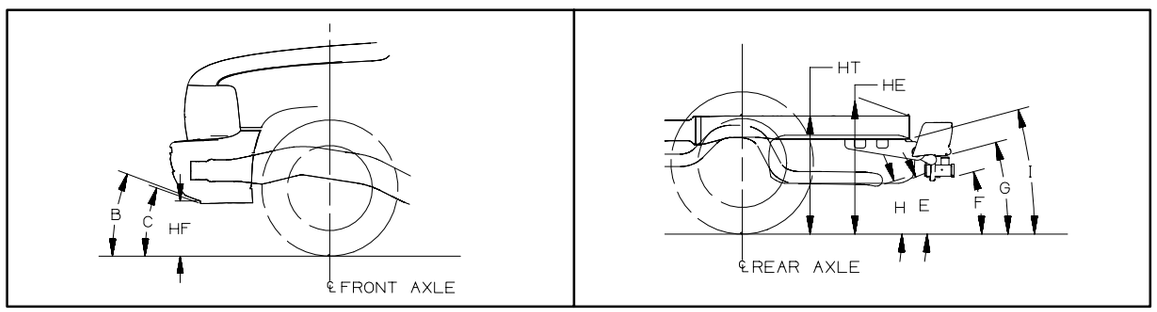

Angle

A ..... **Ramp Breakover**

Approach Angle(s) (Bottom of)

B ..... **Front Bumper**

C ..... **Front Air Deflector**

Departure Angles(s) (Bottom of)

E ..... **Spare Tire**

F ..... **Platform Hitch**

G ..... **Rear Bumper**

H ..... **Exhaust**

I ..... **Frame at End**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

C 15703 119" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 6100 P235/75R16	2264	1526	3791	3150	3750	29.6	9.8	71.4	16.6	28.5	19.9	32.3	22.4	8.6	68.1	14.0	22.9	17.3	24.8	18	30	21	—	18	13	19	17	30
2) 6100 P255/70R16	2264	1526	3791	3150	3750	29.8	9.9	71.6	16.7	28.6	20.0	32.4	22.5	8.7	68.2	14.1	23.0	17.4	24.9	18	30	21	—	17	13	19	17	30

C 15753 143.5" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 6200 P235/75R16	2424	1656	4081	3600	3750	28.9	10.0	71.3	16.3	28.0	19.6	20.5	31.5	22.7	7.5	68.7	13.6	23.1	16.9	17.9	25.2	15	28	19	—	18	13	20	18	30
2) 6200 P255/70R16	2424	1656	4081	3600	3750	29.0	10.2	71.4	16.4	28.1	19.7	20.6	31.6	22.9	7.6	68.8	13.7	23.3	17.0	18.0	25.3	15	29	19	—	18	13	20	18	30

C 15903 133" Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 6400 P235/75R16	2345	1570	3915	3150	3750	29.4	9.7	71.0	16.2	28.2	19.5	32.1	22.9	8.1	67.9	13.6	23.1	16.9	25.4	16	29	20	—	19	12	18	18	27
2) 6400 P255/70R16	2345	1570	3915	3150	3750	29.5	9.8	71.1	16.4	28.4	19.7	32.2	23.1	8.2	68.0	13.7	23.2	17.0	25.5	16	29	20	—	18	12	18	18	27

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle

2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 15953 157.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 6200 P235/75R16	2618	1716	4335	3600	3750	28.7	10.1	71.0	16.1	27.8	19.4	20.2	31.3	22.6	7.9	69.0	13.8	23.1	17.1	18.2	25.0	14	29	20	—	18	12	18	18	26
2) 6200 P255/70R16	2618	1716	4335	3600	3750	28.8	10.2	71.1	16.3	28.0	19.6	20.4	31.4	22.7	8.0	69.2	13.9	23.3	17.2	18.3	25.2	14	29	20	—	18	12	18	18	26

K 15703 119” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 6100 P245/75R16	2522	1570	4093	3925	3750	31.6	12.1	73.6	18.8	30.5	22.1	34.3	24.8	8.3	71.1	15.8	25.4	19.2	27.2	23	31	21	—	21	16	22	22	33
2) 6100 LT245/75R16	2522	1570	4093	3925	3750	31.8	12.5	73.8	19.1	30.8	22.4	34.5	25.3	8.9	71.5	16.3	25.9	19.6	27.7	23	31	21	—	21	16	22	22	33
2) 6100 P265/75R16	2522	1570	4093	3925	3750	32.3	12.7	74.2	19.4	31.2	22.7	34.9	25.5	9.0	71.7	16.5	26.1	19.8	27.8	24	32	22	—	22	17	23	23	34

K 15753 143.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 6400 P245/75R16	2766	1697	4463	3925	3750	31.0	12.2	73.5	18.4	30.1	21.8	22.6	33.6	24.9	9.4	71.1	15.7	25.4	19.1	20.3	27.4	19	33	23	—	22	16	23	22	33
2) 6400 LT245/75R16	2766	1697	4463	3925	3750	31.2	12.6	73.7	18.8	30.4	22.1	22.9	33.8	25.5	9.9	71.5	16.2	25.9	19.5	20.7	27.9	19	33	23	—	22	16	23	22	33
2) 6400 P265/75R16	2766	1697	4463	3925	3750	31.6	12.9	74.1	19.1	30.8	22.4	23.3	34.2	25.6	10.0	71.8	16.4	26.1	19.7	20.9	28.0	20	34	24	—	22	17	23	24	34

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 15903 133" Wheelbase						Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																							
1) 6400 P245/75R16	2601	1616	4217	3925	3750	31.5	12.2	73.3	18.6	30.4	21.9	34.1	25.0	8.9	70.6	15.6	25.4	18.9	27.4	20	32	22	—	22	14	20	22	29
2) 6400 LT245/75R16	2601	1616	4217	3925	3750	31.7	12.5	73.6	18.9	30.6	22.2	34.3	25.5	9.4	71.0	16.0	25.9	19.3	27.9	20	32	22	—	22	15	20	23	29
2) 6400 P265/75R16	2601	1616	4217	3925	3750	32.1	12.8	73.9	19.2	31.0	22.6	34.7	25.6	9.5	71.2	16.2	26.1	19.5	28.1	21	33	23	—	22	15	21	24	30

K 15953 157.5" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 6400 P245/75R16	2861	1746	4608	3925	3750	30.5	12.3	73.0	18.2	29.7	21.6	22.3	33.1	24.9	9.6	71.3	15.8	25.4	19.2	20.5	27.3	17	33	23	—	22	14	20	22	29
2) 6400 LT245/75R16	2861	1746	4608	3925	3750	31.1	12.7	73.5	18.6	30.3	22.0	22.7	33.7	25.4	10.1	71.7	16.3	25.9	19.6	20.9	27.8	17	33	23	—	22	14	20	22	29
2) 6400 P265/75R16	2861	1746	4608	3925	3750	31.5	12.9	73.8	18.9	30.7	22.3	23.1	34.1	25.6	10.3	72.0	16.5	26.1	19.8	21.1	28.0	18	35	25	—	22	15	21	24	30

C 25753 143.5" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 7200 LT225/75R16	2686	1841	4527	3880	4670	32.5	12.2	74.3	19.7	31.4	22.2	23.4	35.1	26.0	10.2	71.6	17.2	26.3	19.7	20.8	28.4	17	33	23	—	22	19	23	23	34
2) 7200 LT245/75R16	2686	1841	4527	4100	4670	33.2	12.8	75.0	20.3	32.1	22.8	24.0	35.8	26.8	10.2	72.3	17.7	27.0	20.1	21.5	29.2	18	34	24	—	23	20	24	25	35

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

C 25903 133” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 7200 LT225/75R16	2576	1811	4387	3880	4670	33.0	11.8	73.8	19.6	31.5	22.1	35.6	26.1	9.3	71.1	16.8	26.3	19.3	28.5	18	31	22	—	17	15	21	24	30
2) 7200 LT245/75R16	2576	1811	4387	4100	4670	33.6	12.4	74.4	20.3	32.2	22.7	36.3	26.8	9.4	71.8	17.3	27.0	19.8	29.3	19	32	22	—	18	16	22	25	31
2) 8600 LT245/75R16	2641	1446	4088	4100	6000	34.6	12.2	74.7	20.4	32.9	22.9	37.2	26.7	9.7	71.6	17.0	26.9	19.5	29.1	19	32	23	—	18	16	22	25	31

C 25953 157.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3134	2032	5167	4100	6000	32.8	12.7	74.4	20.0	31.7	22.4	23.5	35.4	26.5	11.3	72.5	17.9	26.9	20.3	21.7	28.9	17	36	26	—	20	16	22	27	31

K 25753 143.5” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3092	2074	5167	4500	6000	32.5	13.9	75.0	20.9	31.7	23.3	24.2	35.0	26.2	11.4	73.0	18.2	26.9	20.6	22.1	28.6	19	36	26	—	23	17	24	27	34

K 25903 133” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HT	HE	HF	HG	HM	HR	HS	HT	A	B	C	D	E	F	G	H	I
1) 8600 LT245/75R16	3071	2064	5135	4500	6000	32.6	13.9	74.7	20.9	31.6	23.4	35.2	26.1	11.4	72.5	18.2	26.9	20.7	28.4	20	35	26	—	17	15	21	27	30

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

K 25953 157.5" Wheelbase						Frame Heights at Base Model Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																								
1) 8600 LT245/75R16	3218	1991	5210	4500	6000	32.8	13.9	74.9	20.8	31.9	23.3	24.2	35.4	26.3	12.2	73.1	18.6	26.9	21.1	22.3	28.6	17	37	27	—	20	15	21	27	30

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

L/M 110(05, 06)

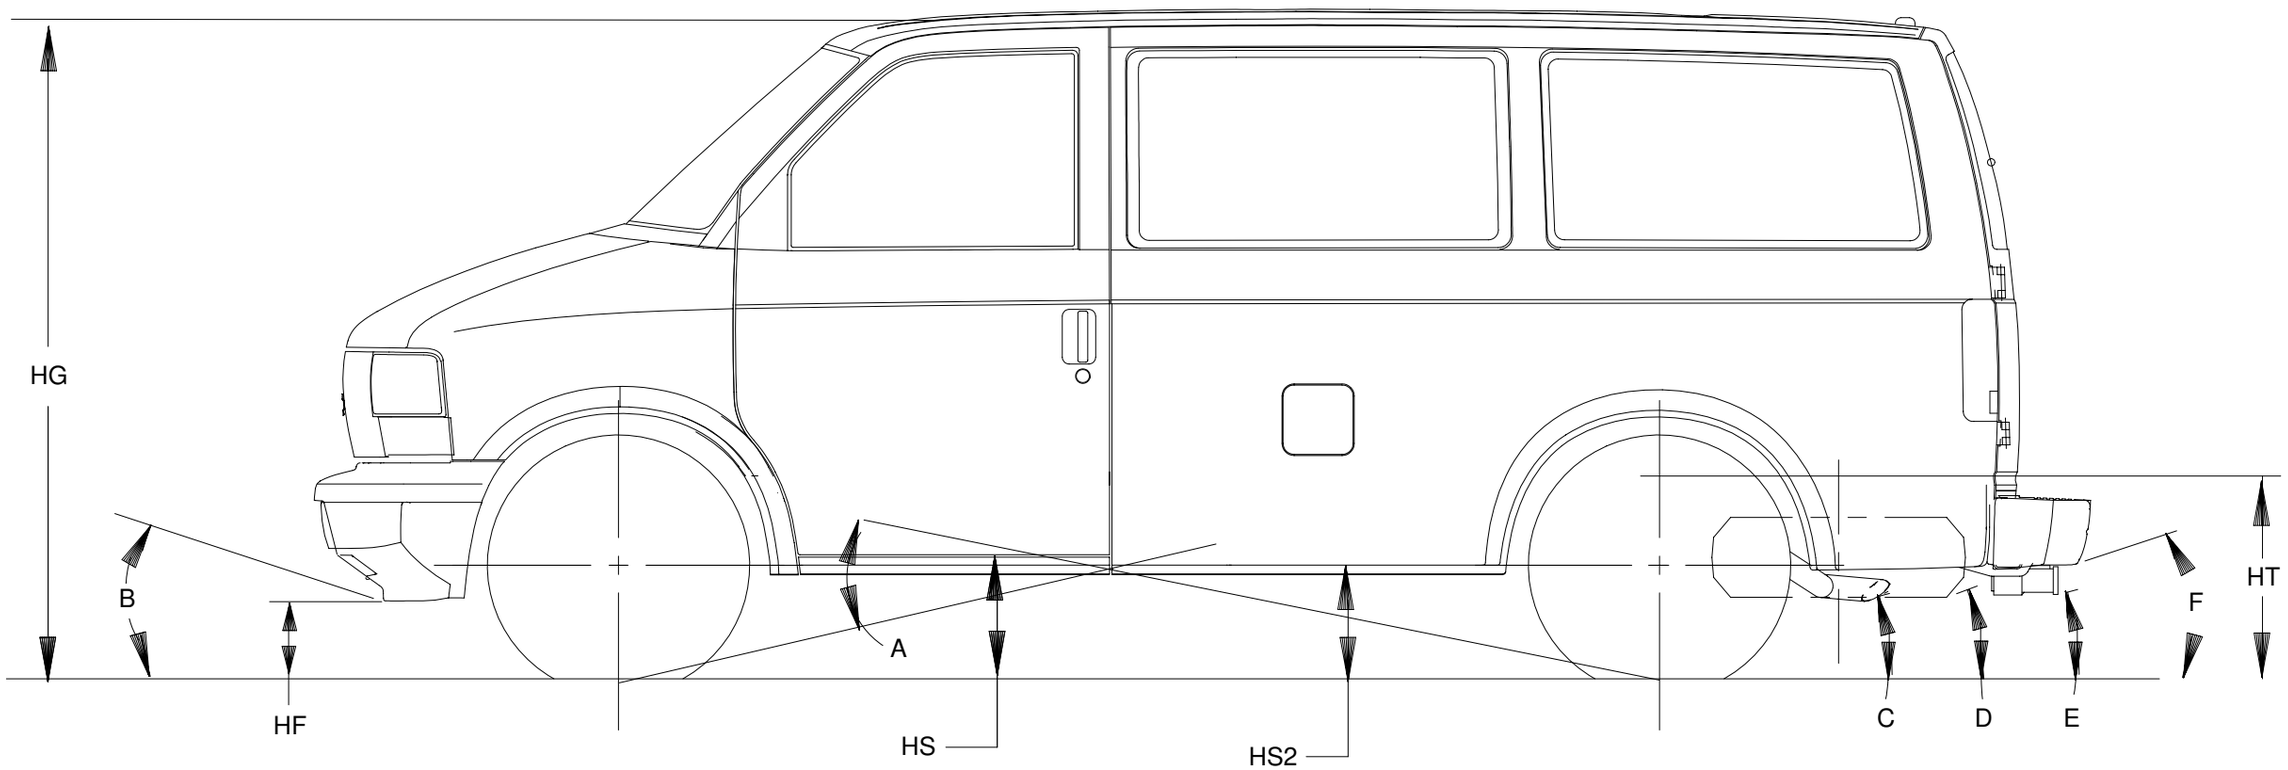

Heights (To Ground)

HF ..... **Bottom of Front Bumper**

HG ..... **Top of Roof**

HS ..... **Step H-Point–Front**

HS2 ..... **Step H-Point–Second**

HT ..... **Rear Cargo Load Height**

Angle

A ..... **Ramp Breakover**

Approach Angle(s) (Bottom of)

B ..... **Air Dam**

Departure Angle(s) (Bottom of)

C ..... **Tail Pipe**

D ..... **Spare Tire**

E ..... **Hitch**

F ..... **Rear Bumper**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

L 11005 111.0” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HT	HG	HS	HS2	HF	HT	HG	HS	HS2	A	B	C	D	E	F
1) 5850 P215/75R15	2410	1681	4092	3050	3150	9.3	26.5	75.2	18.7	20.5	7.8	21.6	72.5	16.4	17.6	28	23	17	18	14	18
2) 6100 P215/75R15	2457	1647	4104	3050	3150	9.2	26.7	75.3	18.8	20.6	8.1	21.8	72.1	16.3	17.4	28	24	17	18	14	18

L 11006 111.0” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HT	HG	HS	HS2	HF	HT	HG	HS	HS2	A	B	C	D	E	F
1) 6100 P215/75R15	2538	1880	4418	3050	3150	9.4	25.8	74.8	18.5	20.1	8.3	21.7	72.2	16.4	17.5	28	24	17	18	14	18

M 11005 111.0” Wheelbase	Base Model Curb Weight			GAWR		Frame Heights at Base Model Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HT	HG	HS	HS2	HF	HT	HG	HS	HS2	A	B	C	D	E	F
1) 5600 P215/75R15	2209	1633	3843	2800	3150	9.5	26.7	75.4	18.9	20.7	8.4	21.5	72.6	16.7	17.7	28	24	16	18	14	18
2) 5950 P215/75R15	2255	1599	3854	2800	3150	9.6	26.8	75.5	19.0	20.8	8.5	21.8	72.1	16.4	17.4	28	25	17	18	14	18
2) 5950 P235/65R15	2255	1599	3854	2800	3150	9.4	26.6	75.3	18.8	20.6	8.3	21.6	71.9	16.3	17.2	27	24	16	18	14	18

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

M 11006 111.0” Wheelbase						Frame Heights at Base Model Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Base Model Curb Weight			GAWR		HF	HT	HG	HS	HS2	HF	HT	HG	HS	HS2	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																
1) 5950 P215/75R15	2339	1849	4189	2800	3150	9.4	25.9	74.9	18.6	20.2	8.5	21.8	72.1	16.4	17.4	28	25	17	18	14	18
2) 5950 P235/65R15	2339	1849	4189	2800	3150	9.2	25.7	74.7	18.4	20.0	8.3	21.6	71.9	16.2	17.2	27	24	16	18	14	18

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

G Van (GMT 600)

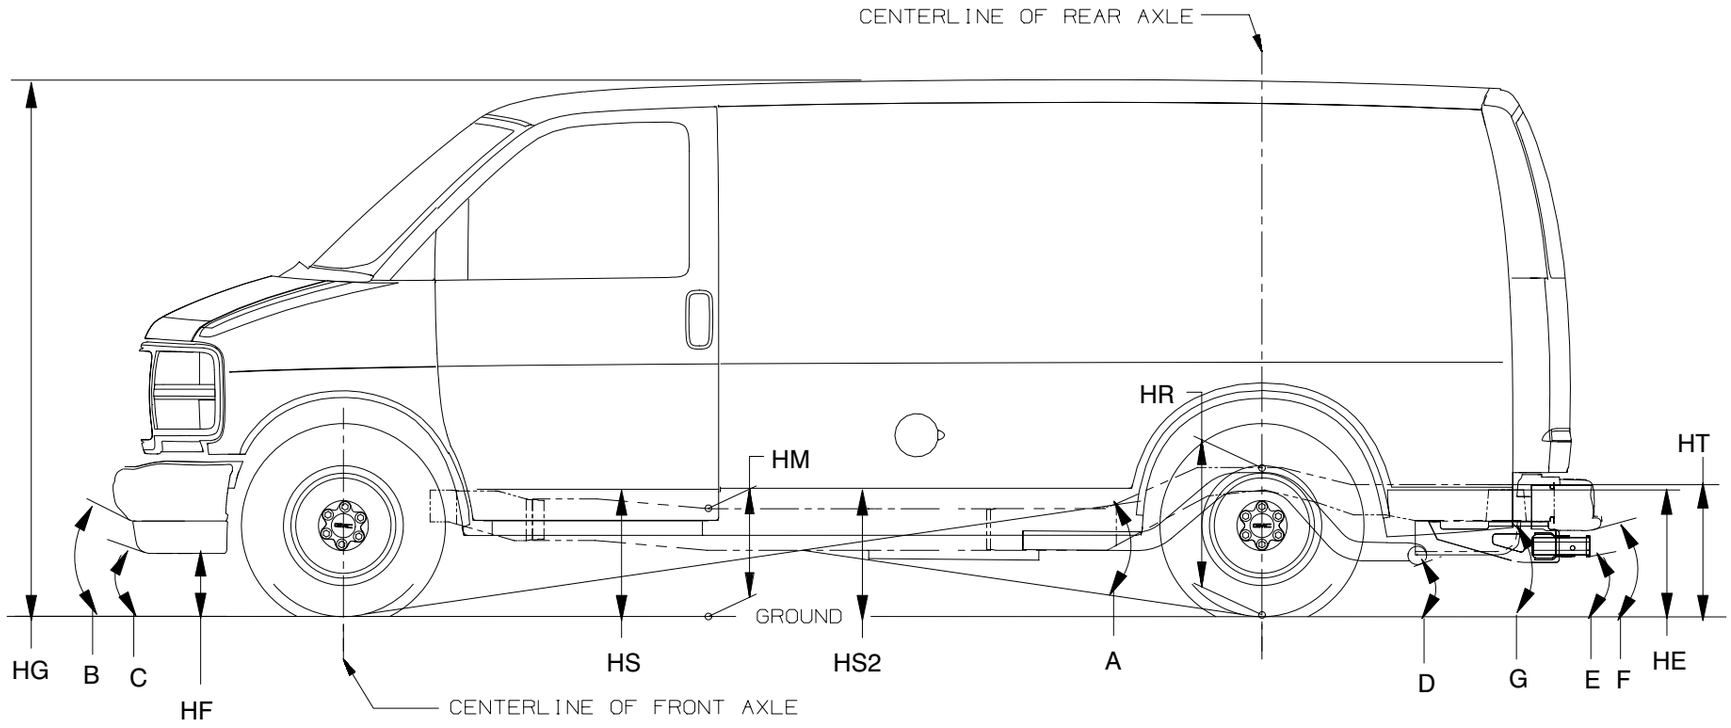

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point–Front**

HS2 ..... **Step H-Point–Second**

HT ..... **Rear Cargo Load Height**

Angle

A ..... **Ramp Breakover**

Approach Angle(s) (Bottom of)

B ..... **Front Bumper**

C ..... **Air Dam**

Departure Angle(s) (Bottom of)

D ..... **Tailpipe**

E ..... **Platform Hitch**

F ..... **Rear Bumper**

G ..... **Frame at End**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

G 11405	135.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 6100 P215/75R15	2467	2073	4541	3168	3168	15.1	79.8	16.9	23.1	16.9	17.4	24.3	13.5	78.3	15.3	21.2	15.3	15.8	22.1	18	28	21	22	11	16
2) 7100 P235/75R15	2478	2083	4561	3600	3968	15.5	81.3	17.9	24.8	17.9	18.6	26.3	12.9	78.7	15.3	21.5	15.2	16.0	22.4	18	27	20	23	12	17

G 11406	135.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 7100 P235/75R15	2666	2292	4958	3600	3968	15.0	80.9	17.5	24.4	17.4	18.2	25.9	12.9	78.7	15.3	21.5	15.2	16.0	22.4	18	27	20	23	12	17

G 21405	135.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 7300 LT225/75R16	2492	2199	4691	3580	4380	16.9	82.6	19.2	26.1	19.2	19.9	27.5	14.7	79.9	16.8	22.5	16.7	17.4	23.1	21	30	23	24	12	17
2) 8600 LT225/75R16	2489	2218	4707	3800	5360	16.8	83.7	19.7	27.2	19.6	20.6	28.9	14.1	80.8	16.9	23.8	16.9	18.0	25.0	21	29	22	29	14	19

G 21406	135.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 8600 LT225/75R16	3048	2545	5594	3800	5360	16.8	83.1	19.4	26.6	19.4	20.2	28.2	15.7	80.9	17.7	23.8	17.7	18.5	24.7	22	32	25	28	14	19

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

G 21705	155.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 7300 LT225/75R16	2639	2238	4877	3580	4380	15.3	81.2	18.2	26.0	18.2	19.2	27.7	13.7	78.6	16.2	22.5	16.1	17.1	23.5	17	28	21	25	12	17
2) 8600 LT225/75R16	2636	2256	4892	4100	5360	16.5	82.3	19.4	27.1	19.3	20.3	28.8	13.5	79.6	16.5	23.8	16.4	18.0	25.0	18	28	21	29	14	19
2) 8600 LT225/75R16	3169	2378	5547	4300	5360	16.6	82.2	19.4	27.1	19.3	20.3	28.8	14.7	80.2	17.3	23.9	17.3	18.6	24.8	19	30	23	28	14	19

G 21706	155.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 8600 LT225/75R16	3100	2799	5899	4100	5360	16.9	81.3	19.2	26.2	19.1	19.9	27.6	15.1	80.1	17.4	23.8	17.4	18.6	24.7	19	31	24	28	14	19

G 31405	135.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 9500 LT245/75R16	2781	2480	5262	4300	6084	17.3	84.0	20.1	27.4	20.0	21.0	29.1	14.3	81.5	17.3	24.2	17.3	18.6	25.4	22	30	23	30	15	20

G 31406	135.0” Wheelbase					Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																			
1) 9500 LT245/75R16	2980	2802	5783	4300	6084	17.6	83.5	20.0	26.8	20.0	20.7	28.4	15.2	81.5	17.8	24.2	17.7	18.9	25.3	22	31	24	30	15	20

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

G 31503 139.0” Wheelbase						Heights at Base Model Curb Weight						Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HE	HF	HG	HM	HR	HS	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																			
1) 9500 LT245/75R16	2523	1516	4039	4100	6084	28.7	17.3	84.0	24.0	30.1	21.2	25.2	14.2	81.8	21.2	27.1	18.3	23	29	22	29	—	—	18
2) 10,000 LT225/75R16	2755	1815	4570	4100	7500	28.3	16.3	83.2	23.2	29.5	20.3	23.1	13.7	82.1	20.7	26.1	17.8	22	28	21	26	—	—	16
2) 11,000 LT225/75R16	2755	1815	4570	4100	8250	28.4	16.3	83.2	23.2	29.5	20.4	23.3	13.8	81.8	20.6	26.1	17.7	22	28	21	26	—	—	16
2) 12,000 LT225/75R16	2755	1815	4570	4300	8600	28.4	16.3	83.3	23.2	29.5	20.4	23.8	13.4	81.1	20.3	26.1	17.4	22	28	21	27	—	—	16

G 31532 139.0” Wheelbase						Heights at Base Model Curb Weight						Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HE	HF	HG	HM	HR	HS	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																			
1) 9500 LT245/75R16	2758	1653	4411	4100	6084	28.9	16.8	83.8	23.7	30.0	20.9	25.2	14.2	81.8	21.2	27.1	18.3	23	29	22	29	—	—	18
2) 11,500 LT225/75R16	2829	1732	4561	4300	8250	28.5	16.1	83.2	23.2	29.6	20.3	23.7	13.4	81.3	20.3	26.1	17.5	22	28	20	27	—	—	16
2) 12,300 LT225/75R16	2829	1732	4561	4300	8600	28.8	16.1	83.3	23.2	29.8	20.4	24.1	13.5	80.8	20.3	26.1	17.4	22	28	21	27	—	—	17

G 31705 155.0” Wheelbase						Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Base Model Curb Weight			GAWR		HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																				
1) 9500 LT245/75R16	2911	2541	5452	4300	6084	17.1	82.5	19.8	27.4	19.8	20.7	29.0	14.4	80.1	17.2	24.3	17.2	18.7	25.4	19	30	23	30	15	20

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

G 31706 155.0" Wheelbase	Base Model Curb Weight			GAWR		Heights at Base Model Curb Weight							Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear											
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HF	HG	HM	HR	HS	HS2	HT	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F
[1] 9500 LT245/75R16	3088	2991	6080	4300	6084	17.5	81.8	19.8	26.7	19.7	20.4	28.1	15.2	80.5	17.7	24.3	17.7	18.9	25.3	20	31	24	30	15	20

G 31803 159.0" Wheelbase	Base Model Curb Weight			GAWR		Heights at Base Model Curb Weight						Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HE	HF	HG	HM	HR	HS	A	B	C	D	E	F	G
[1] 10,000 LT225/75R16	2795	1779	4575	4100	7500	28.1	16.3	83.0	23.0	29.5	20.2	23.1	13.8	82.1	20.5	26.1	17.7	21	28	21	26	—	—	16
[2] 11,000 LT225/75R16	2795	1779	4575	4100	8250	28.2	16.3	83.0	23.0	29.5	20.2	23.2	13.9	81.8	20.4	26.1	17.7	21	28	21	26	—	—	16
[2] 12,000 LT225/75R16	2795	1779	4575	4300	8600	28.2	16.3	83.0	23.0	29.5	20.2	23.7	13.6	81.0	20.1	26.1	17.3	21	28	21	26	—	—	16

G 31832 159.0" Wheelbase	Base Model Curb Weight			GAWR		Heights at Base Model Curb Weight						Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Frt	Rr	Ttl	Frt	Rr	HE	HF	HG	HM	HR	HS	HE	HF	HG	HM	HR	HS	A	B	C	D	E	F	G
[1] 11,500 LT225/75R16	2849	1775	4625	4300	8250	28.2	16.2	82.9	23.0	29.6	20.2	23.6	13.5	81.2	20.2	26.1	17.4	21	28	21	26	—	—	16
[2] 12,300 LT225/75R16	2849	1775	4625	4300	8600	28.5	16.2	83.0	23.0	29.8	20.2	23.6	13.6	80.7	20.1	26.1	17.3	21	28	21	27	—	—	17

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

G 31903 177.0" Wheelbase						Heights at Base Model Curb Weight						Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HE	HF	HG	HM	HR	HS	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																			
1) 12,000 LT225/75R16	2868	1774	4642	4300	8600	27.8	16.9	83.1	23.2	29.6	20.4	23.3	14.5	81.3	20.5	26.1	17.7	19	29	23	26	—	—	16

G 31932 177.0" Wheelbase						Heights at Base Model Curb Weight						Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/Tire	Base Model Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HE	HF	HG	HM	HR	HS	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																			
1) 12,300 LT225/75R16	2922	1765	4687	4300	8600	28.2	16.7	83.1	23.2	29.8	20.4	23.6	14.5	81.0	20.5	26.1	17.7	19	29	23	26	—	—	16

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 30032 Models w/Independent Front Suspension

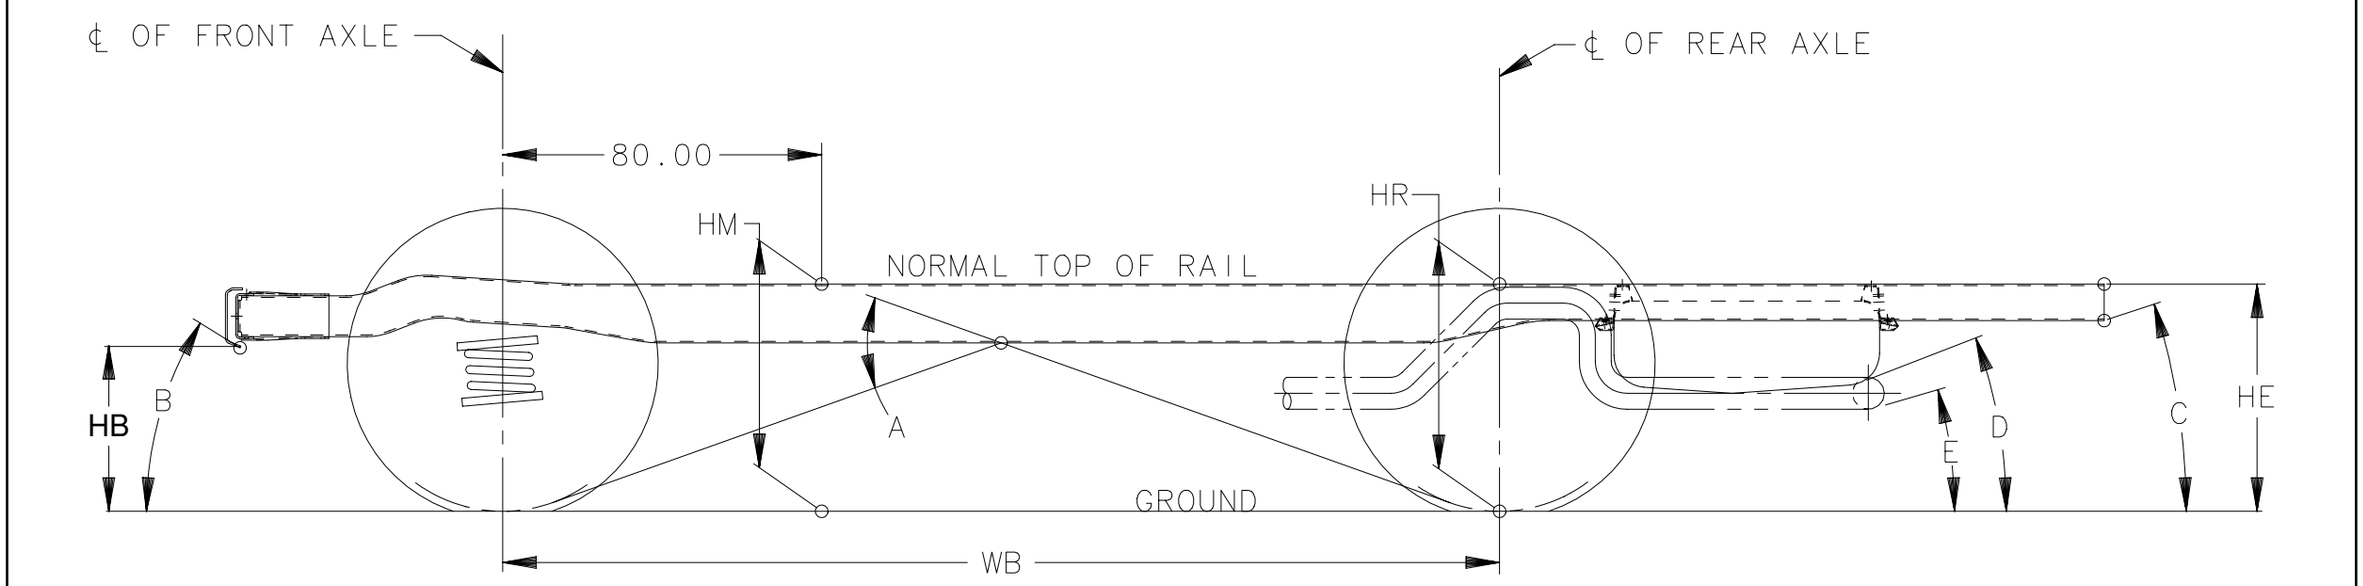

Heights (To Ground)

HB ..... **Bottom of Bumper**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HE ..... **Top of Frame at End**

Angle

A ..... **Ramp Breakover (Muffler)**

Approach Angle(s) (Bottom of)

B ..... **Front crossmember**

Departure Angle(s) (Bottom of)

C ..... **Frame**

D ..... **Fuel tank**

E ..... **Tail pipe**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

P 31432 158.5” Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 12,300 7.5R/16D	2513	1889	4402	4880	7500	21.0	28.9	28.3	28.6	17.9	23.8	24.7	24.1	17	35	17	14	12
2) 14,800 225/70R19.5	2609	2159	4769	5500	10,000	21.2	33.3	29.7	32.0	17.5	27.5	25.7	27.1	19	34	20	18	16

P 31832 178.0” Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 14,800 225/70R19.5	2615	2218	4833	5500	10,000	21.3	33.7	29.6	31.9	17.5	27.6	25.6	27.0	17	34	13	18	16
2) 16,500 225/70R19.5	2615	2218	4833	5500	11,000	21.2	33.9	29.6	32.0	17.7	27.5	25.4	26.6	16	34	13	17	16

P 31932 190.0” Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 14,800 225/70R19.5	2654	2244	4898	5500	10,000	21.3	33.6	29.5	31.9	17.6	27.6	25.5	27.0	16	34	13	18	16
2) 16,500 225/70R19.5	2654	2244	4898	5500	11,000	21.2	33.8	29.5	32.0	17.7	27.5	25.4	26.6	15	34	13	17	16

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 32032 208.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 14,800 225/70R19.5	2677	2247	4924	5500	10,000	21.3	33.5	29.4	31.9	17.6	27.5	25.5	27.0	14	34	13	17	16
2) 16,500 225/70R19.5	2677	2247	4924	5500	11,000	21.3	33.7	29.4	32.0	17.7	27.4	25.3	26.6	14	34	13	17	15

P 32132 228.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 16,500 225/70R19.5	2841	2292	5133	5500	11,000	21.1	33.6	29.2	32.0	17.7	27.3	25.3	26.6	13	34	13	17	15

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 30042 Models with Independent Front Suspension

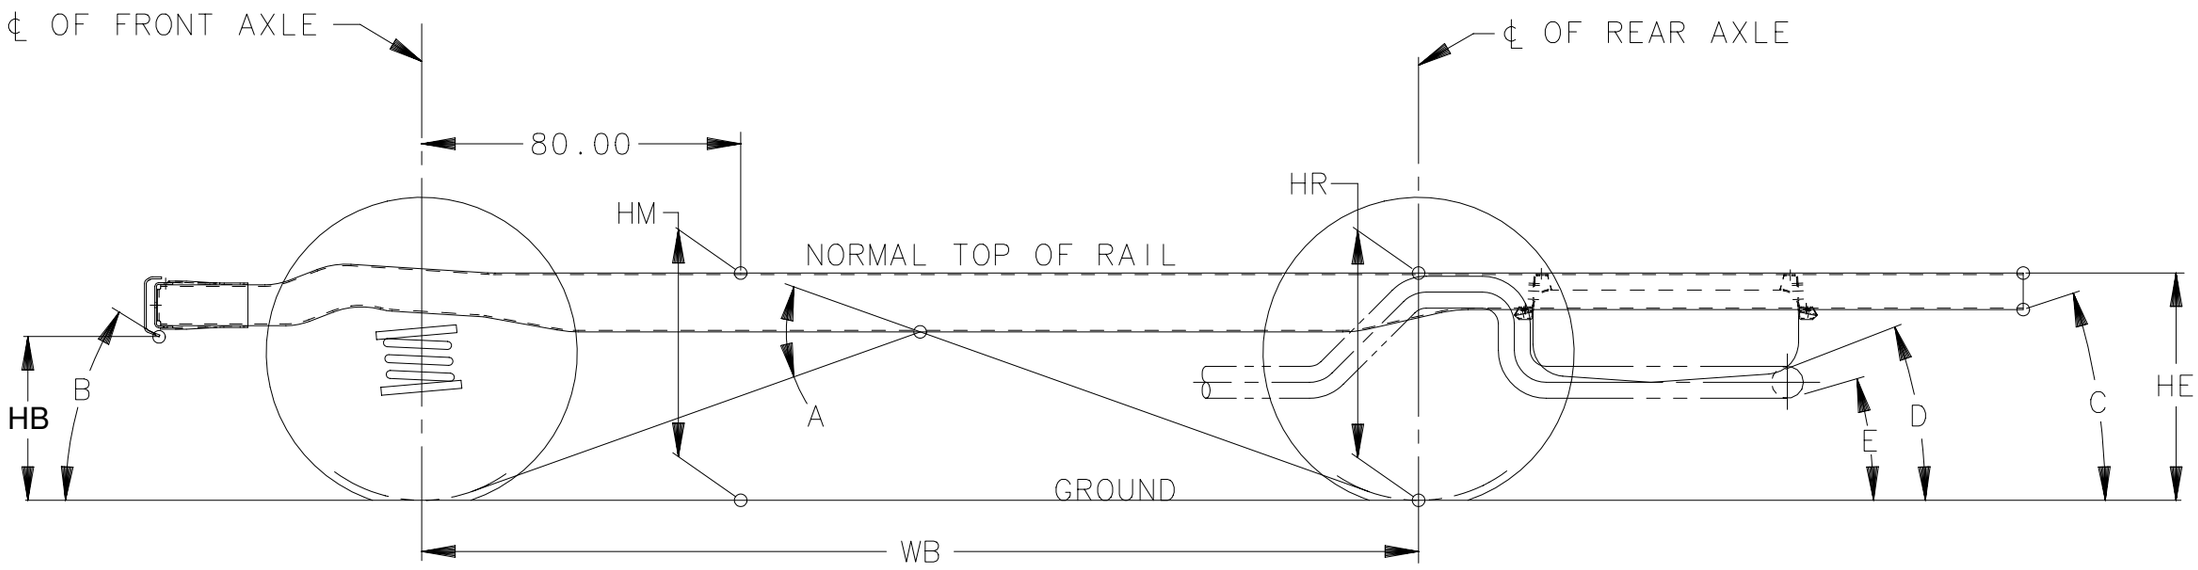

Heights (To Ground)

HB ..... **Bottom of Bumper**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HE ..... **Top of Frame at End**

Angle

A ..... **Ramp Breakover (Muffler)**

Approach Angle(s) (Bottom of)

B ..... **Front crossmember**

Departure Angle(s) (Bottom of)

C ..... **Frame**

D ..... **Fuel tank**

E ..... **Tail pipe**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

P 30842 125.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 9400 LT245/75R16	2175	1679	3854	4000	6084	18.3	28.4	27.2	27.9	15.6	22.7	24.0	23.5	22	29	21	12	14
2) 10,000 LT215/85R16	2267	1931	4198	4000	7900	18.0	28.9	27.2	28.2	16.6	22.1	24.7	23.6	23	31	20	11	13
2) 11,000 LT215/85R16	2267	1931	4198	4000	7900	18.0	28.9	27.2	28.2	16.8	22.3	24.6	23.6	23	31	20	12	13
2) 12,000 8R19.5	2445	2333	4778	4500	11,000	19.4	32.4	29.4	31.2	18.8	26.3	27.9	27.5	29	33	24	16	19
2) 14,100 8R19.5	2445	2333	4778	4500	11,000	19.4	32.4	29.4	31.2	19.0	26.7	27.6	27.5	28	34	24	16	19

P 31042 133.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 9400 LT245/75R16	2178	1692	3870	4000	6084	18.3	28.6	27.2	28.0	15.5	23.1	24.1	23.9	21	29	16	13	15
2) 10,000 LT215/85R16	2270	1942	4213	4000	7900	18.0	29.0	27.1	28.2	16.6	21.8	24.7	23.6	22	31	15	11	13
2) 11,000 LT215/85R16	2270	1942	4213	4000	7900	18.0	29.0	27.1	28.2	16.8	22.0	24.6	23.6	22	31	15	12	14
2) 12,000 8R19.5	2449	2345	4794	4500	11,000	19.2	32.6	29.1	31.1	18.3	25.5	27.5	27.1	27	33	18	16	19
2) 14,100 8R19.5	2449	2345	4794	4500	11,000	19.1	32.9	29.2	31.3	18.5	26.2	27.2	27.2	26	34	18	16	20

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 31442 157.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 9400 LT245/75R16	2209	1704	3914	4000	6084	18.3	28.3	27.1	27.9	15.6	22.7	23.9	23.5	18	29	16	12	14
2) 10,000 LT215/85R16	2301	1956	4257	4000	7900	18.0	28.8	27.0	28.2	16.6	22.1	24.8	23.6	19	31	15	12	14
2) 11,000 LT215/85R16	2301	1956	4257	4000	7900	18.0	28.8	27.0	28.2	16.1	22.3	25.3	23.6	20	30	16	12	14
2) 12,000 8R19.5	2479	2358	4837	4500	11,000	21.3	31.6	30.2	31.1	18.4	25.7	27.4	27.1	23	33	18	16	19
2) 14,100 8R19.5	2479	2358	4837	4500	11,000	21.3	31.6	30.2	31.1	18.6	26.3	27.2	27.1	22	34	19	16	20

P 31842 178.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
1) 10,000 LT215/85R16	2221	1940	4161	4000	7900	17.9	29.5	27.0	28.5	16.6	20.2	24.6	22.4	25	31	7	5	5
2) 11,000 LT215/85R16	2221	1940	4161	4000	7900	17.9	29.5	27.0	28.5	16.7	20.5	24.5	22.5	24	31	7	5	5
2) 12,000 8R19.5	2380	2244	4624	4500	11,000	21.3	32.2	30.3	31.5	18.3	23.9	27.3	26.0	30	33	8	7	7
2) 14,100 8R19.5	2380	2244	4624	5000	11,000	21.3	32.2	30.3	31.5	17.5	25.2	26.7	26.5	30	32	9	8	8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 00042 Models with "I" Beam FK4/FK5 Front Axle

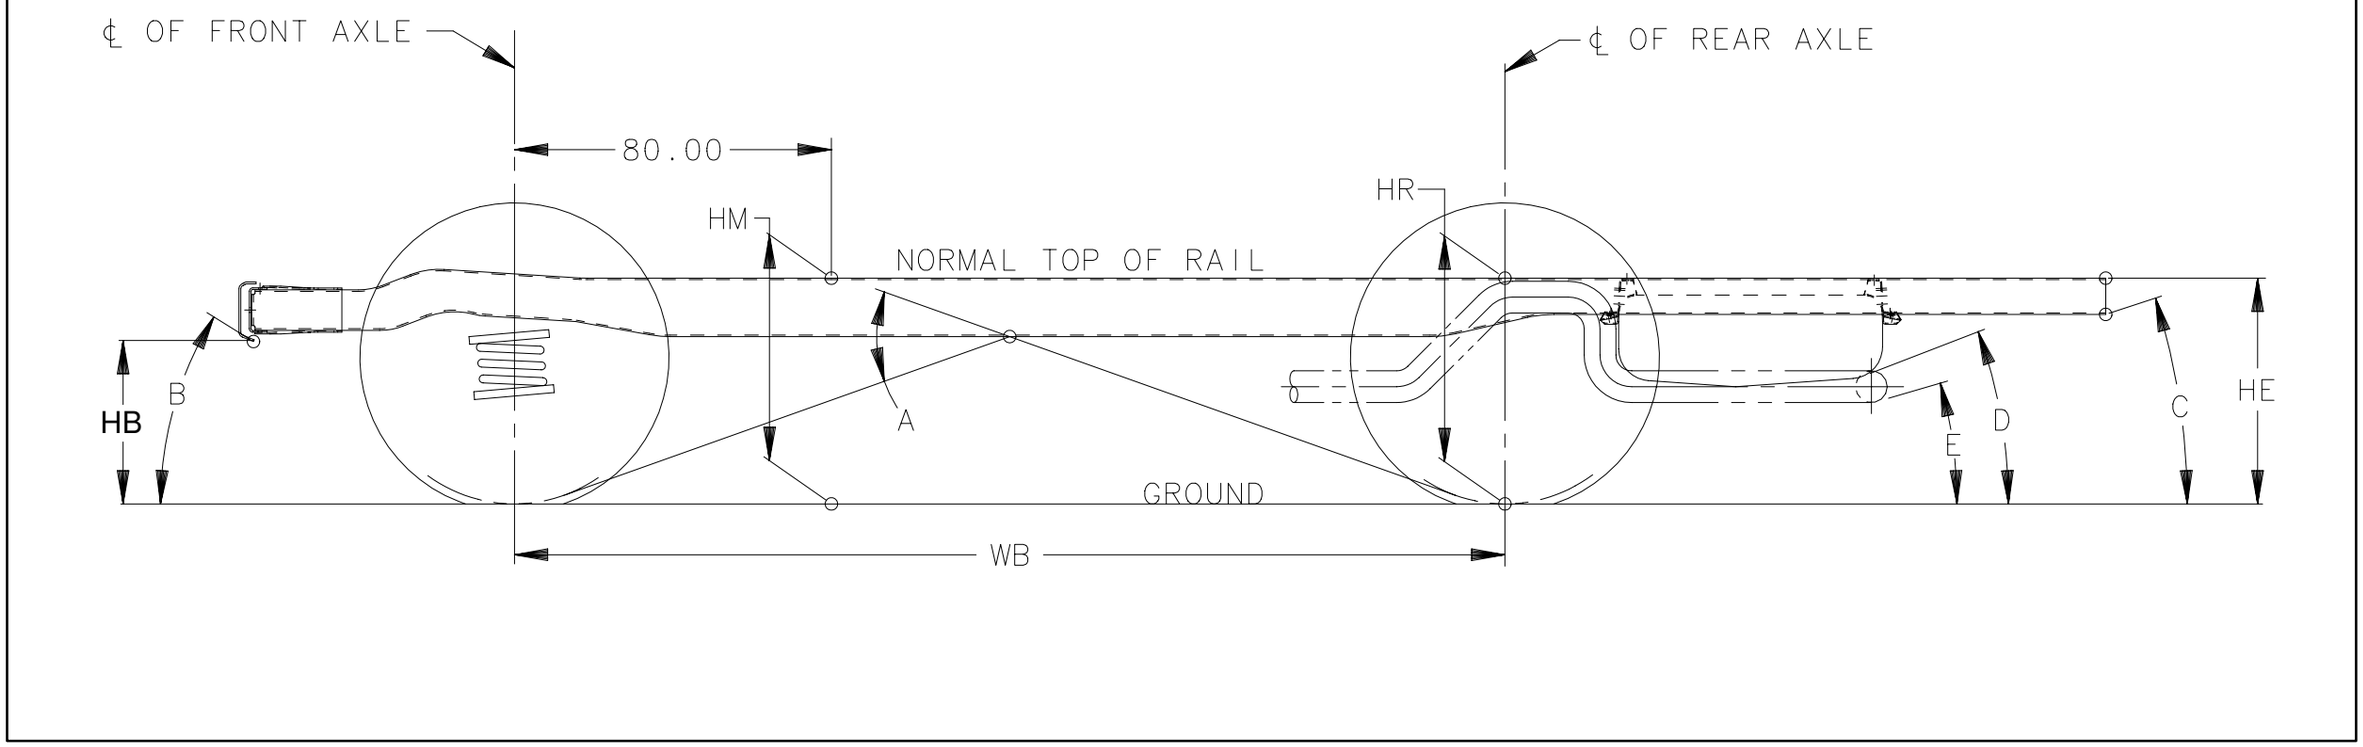

Heights (To Ground)

HB ..... Bottom of Bumper

HM ..... Normal Top of Frame

HR ..... Top of Frame at Centerline of Rear Axle

HE ..... Top of Frame at End

Angle

A ..... Ramp Breakover (Muffler)

Approach Angle(s) (Bottom of)

B ..... Front crossmember

Departure Angle(s) (Bottom of)

C ..... Frame

D ..... Fuel tank

E ..... Tail pipe

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

P 30842 125.0” Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
[2] 10,000 LT215/85R16	2198	1931	4128	4400	7900	18.8	28.6	27.6	28.2	15.4	21.9	24.1	23.6	23	29	20	11	13
[2] 11,000 LT215/85R16	2198	1931	4128	4400	7900	18.8	28.6	27.6	28.2	15.6	22.6	24.0	23.6	22	29	20	12	14
[2] 12,000 8R19.5	2616	2317	4933	5000	11,000	20.7	32.0	30.0	31.2	17.5	25.6	27.3	27.5	28	31	23	15	18
[2] 14,100 8R19.5	2616	2317	4933	5000	11,000	20.7	32.0	30.0	31.2	17.8	27.0	27.1	27.5	27	32	24	16	20
[2] 14,500 8R19.5 (School Bus)	2595	2409	5004	5000	11,000	20.7	31.9	30.0	31.2	17.8	27.2	27.0	27.5	27	32	24	17	20

P 31042 133.0” Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
[2] 10,000 LT215/85R16	2200	1942	4143	4400	7900	18.8	28.7	27.6	28.2	15.4	21.5	24.1	23.6	21	29	15	11	13
[2] 11,000 LT215/85R16	2200	1942	4143	4400	7900	18.8	28.7	27.6	28.2	15.6	22.3	24.0	23.6	21	29	15	12	14
[2] 12,000 8R19.5	2621	2329	4950	5000	11,000	20.4	32.1	29.8	31.1	17.1	24.6	26.9	27.1	26	31	17	15	18
[2] 14,100 8R19.5	2621	2329	4950	5000	11,000	20.4	32.1	29.8	31.1	17.3	26.4	26.6	27.1	26	32	19	16	20
[2] 14,500 8R19.5 (School Bus)	2573	2493	5066	5000	11,000	20.5	31.9	29.8	31.0	17.4	26.6	26.6	27.1	25	32	19	17	20

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 31442 157.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
[2] 10,000 LT215/85R16	2232	1956	4187	4400	7900	18.7	28.6	27.5	28.2	15.4	21.8	24.1	23.6	18	29	15	11	13
[2] 11,000 LT215/85R16	2232	1956	4187	4400	7900	18.7	28.6	27.5	28.2	15.6	22.5	23.9	23.6	18	29	16	12	14
[2] 12,000 8R19.5	2651	2342	4993	5000	11,000	20.4	32.0	29.7	31.1	17.2	25.0	26.8	27.1	22	31	18	15	19
[2] 14,100 8R19.5	2651	2342	4993	5000	11,000	20.4	32.0	29.7	31.1	17.4	26.5	26.5	27.1	22	32	19	16	20
[2] 14,500 8R19.5 (School Bus)	2608	2504	5112	5000	11,000	20.5	31.8	29.7	31.0	17.4	26.7	26.5	27.1	21	32	19	17	20

P 31842 178.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
[2] 10,000 LT215/85R16	2145	1940	4086	4400	7900	18.9	28.9	27.6	28.4	15.4	19.6	24.1	22.3	24	29	7	5	5
[2] 11,000 LT215/85R16	2145	1940	4086	4400	7900	18.9	28.9	27.6	28.4	15.5	21.2	23.9	22.8	24	29	7	6	6
[2] 12,000 8R19.5	2542	2234	4776	5000	11,000	20.4	33.0	29.8	31.7	17.0	22.4	26.8	25.5	30	31	8	7	7
[2] 14,100 8R19.5	2542	2234	4776	5000	11,000	20.4	33.0	29.8	31.7	17.2	25.8	26.5	26.7	29	31	9	8	8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base vehicle
2) Optional GVWR–contain minimum equipment required

FRAME HEIGHTS AND RAMP ANGLE DATA

P 30012 Models with "I" Beam F10/FK8 Front Axle

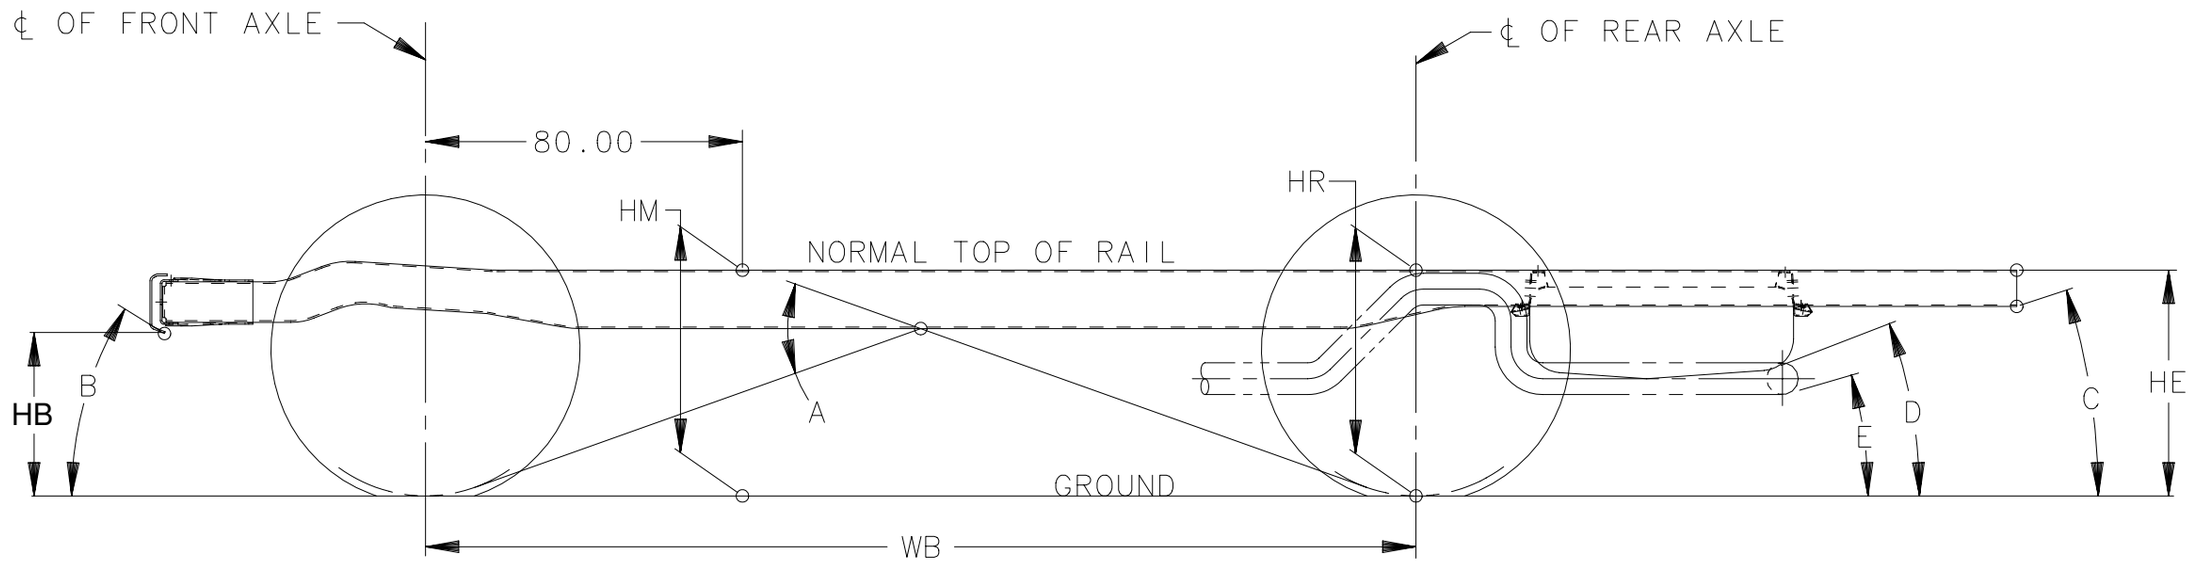

Heights (To Ground)

HB ..... **Bottom of Bumper**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HE ..... **Top of Frame at End**

Angle

A ..... **Ramp Breakover (Muffler)**

Approach Angle(s) (Bottom of)

B ..... **Front crossmember**

Departure Angle(s) (Bottom of)

C ..... **Frame**

D ..... **Fuel tank**

E ..... **Tail pipe**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHTS AND RAMP ANGLE DATA

P 32012 208.0" Wheelbase						Frame Heights at Base Model Curb Weight				Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Base Model Curb Weight			GAWR		HB	HE	HM	HR	HB	HE	HM	HR	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr													
[2] 21,000 245/70R19.5	3419	3469	6889	7500	13,500	12.4	38.4	32.8	36.1	9.2	34.4	29.4	32.3	17	18	13	12	20
[2] 22,500 235/80R22.5	3419	3469	6889	8000	14,500	14.7	40.8	35.1	38.4	11.1	36.3	31.3	34.2	19	22	14	13	23